



Digital Tracking Receiver

Multiple Bands



Shown below is the DTR rear panel:



Key Features

- ❖ L-band range of 950 - 2050 MHz
- ❖ L, S, C, X, Ku, and Ka-band single and multi-band configurations available
- ❖ Single/Dual direct-connect polarization inputs
- ❖ Wide input signal dynamic range (70 dBm nominal)
- ❖ Outstanding sensitivity
- ❖ (minimum C/No is better than 35 dB-Hz)
- ❖ Fully synthesized tuning with 1 kHz tuning steps
- ❖ User-selectable tracking slope
- ❖ Spectral Display

Additional Features

- ❖ Contextual menus, spin knob and keypad aid user interaction
- ❖ Monopulse capability
- ❖ Excellent tracking signal linearity
- ❖ Absolute input power level display
- ❖ Serial and parallel remote control capability (contact closure; RS-232, RS-422)
- ❖ Front Panel 70 MHz monitor port (50 Ω BNC female)

Product Description

Our Digital Tracking Receiver (DTR) is a fully synthesized tracking receiver developed for satellite tracking and uplink power control applications. This DSP-based receiver accepts wideband RF inputs, performs frequency selection, and digitally processes the selected signal.

The DTR can be configured for numerous input frequency ranges from L-band to Ka-band. Multi-band applications are also readily accommodated. DDS techniques facilitate 1 kHz frequency resolution for any input frequency range.

The use of DSP technology, rather than conventional analog radio techniques, provides outstanding linearity and operational flexibility. Software controlled signal detection can accommodate virtually any modulation scheme.


A powerful and intuitive user interface provides the ability to custom configure specific applications in a very straightforward manner. The user settings provide easy configuration of tracking signal slope to match a wide range of next-level system components. A "Spectral Display" function allows the user to view real time amplitude vs. frequency data.

The flexibility and unparalleled attributes, resulting from state-of-the art concepts and components, places the DTR at the forefront of receiver technology

Digital Tracking Receiver Multiple Bands

code-g7

Band	Frequency(GHz)	Input	Physical data	
L	0.950 -2.050	50Ω, Type N	Dimensions (in.)	3.5H 19W 22D
S	2.2 -2.4	50Ω, Type N		(2 EIA Rack Units)
C	3.4 -4.8 ¹	50Ω, Type N	Power	110-240 VAC 50/60 Hz
X	7.25 -7.75	50Ω, Type N	Operating Temperature Range	0 to 50°C
Ku	10.7 -13.0 ¹	50Ω, Type N	Storage Temperature Range	-15 to 50°C
Ka	17.0 -22.3 ¹	50Ω, SMA	Humidity	90%, Noncondensing
Multi-band, 70 MHz	Please Call	Please Call	Weight	25 lbs.
¹ Frequency band may require multiple downconverters to achieve full spectrum listed -please call.			L-band Max Power Consumption	45W
RF Specifications			Optional Features	
Tuning Resolution	1 kHz		Additional buffered DC Tracking Signal Output	
Frequency Stability (0-50°C)	± 5 PPM		Dual Channel Configuration for Monopulse Tracking	
RF Signal Input Impedance	50 Ω		Communication Carrier Tracking Capability	
Input Total Power Level	-10 dBm max		Additional RF Inputs for Dual Pol/Multi-Band Applications	
Input Signal Level Range	-40 to -110 dBm (nominal)		Ordering Information	
Minimum Signal Level Input C/No	35 dB-Hz		Specify:	
Detection Type	FFT-Based, Non-Coherent Integration		Input frequency range(s)	
Serial Data Interface	RS-232, RS-422		Single or Dual Pol Input	
Serial Data Rates	1200, 9600, 19.2k, 38.4k, 56k bps		Line Voltage	
Analog Tracking Voltage Outputs	-10 to +10 VDC (Configurable) 14-bit Resolution		One or two buffered DC outputs	
Tracking Voltage Sensitivity (Tracking Slope)	User Adjustable (-1V/dB -+1V/dB)		Optional Features	
Tracking Voltage Linearity (over a 50 dB input range)	± 0.5 dB		System Specifics	
70 MHz IF Monitor Port Impedance	50 Ω			

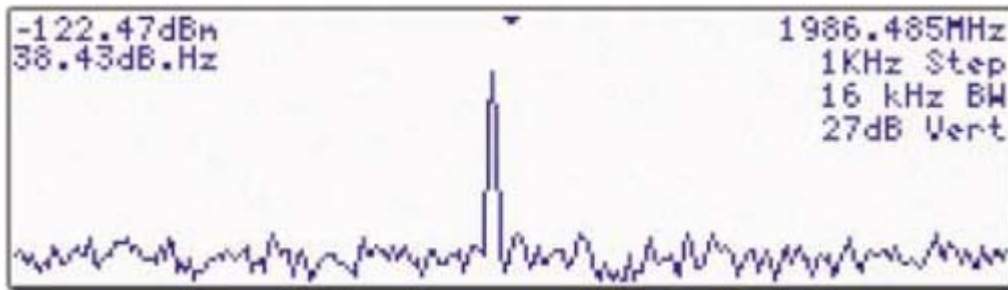

The Spectral Display offers a convenient amplitude vs. frequency display of the received signal. The display is useful for system fault isolation, for routine maintenance and is also cost effective when a full function spectrum analyzer is not available or necessary.