RADITEK INC.

RoHS COMPLIANT

code-i5

Broadband Attenuator, 4-18 GHz, 15 dB Attenuation, SMA or N Female Connector, 5 Watt, 3 Kilowatt Peak

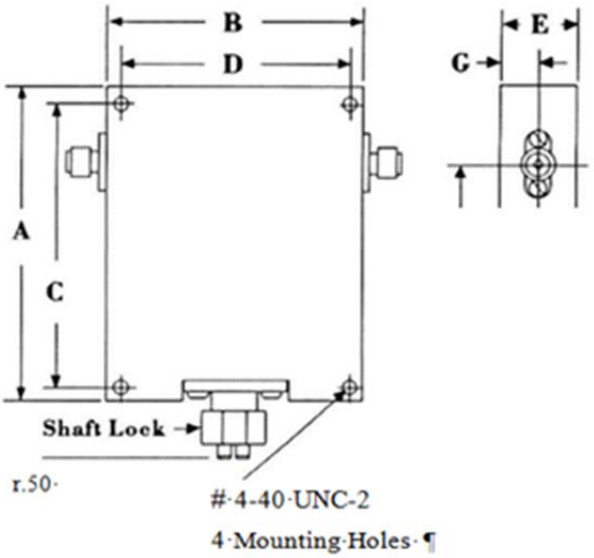

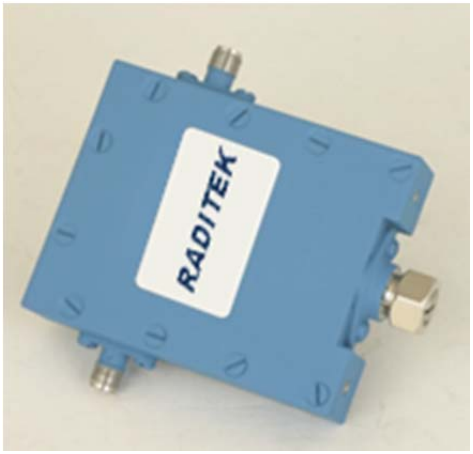

Units: Inch
Not to scale

Dimensions and Inches

A	B	C	D	E	G
2.50	2.00	tba	tba	0.56	0.28

Order Examples: **RATTN-4-18-15d-Sf-5W-3kW-Peak-i5**
Description: *(Broadband Attenuator, 4-18 GHz, 15 dB Attenuation, SMA Female Connector, 5 Watts, 3 Kilowatt Peak)*

Specifications		**Units**
Frequency Range	4-18	GHz
RF Power	5 Average	Watt
	3kW peak	
Attenuation Value	15	dB
Insertion Loss	1	dB max
VSWR	1.7:1	max
Temperature Range	-55 to +85	ºC
Temperature Range	-55 to +85	ºC
Options	Panel Mount/ Turn Counter/Digital Readout	

WORLD HQ: 1702L Meridian Ave. Suite 127, San Jose, Ca 95125, U.S.A.
Tel: (408) 266-7404 FAX: (408) 266-4483
WEB: www.raditek.com E-mail: sales@raditek.com