RADITEK INC.

RoHS COMPLIANT

code-v14

Attenuator, DC-3.0GHz, 3-60dB Attenuation

N-Male to N-Female Connectors, 200 Watts

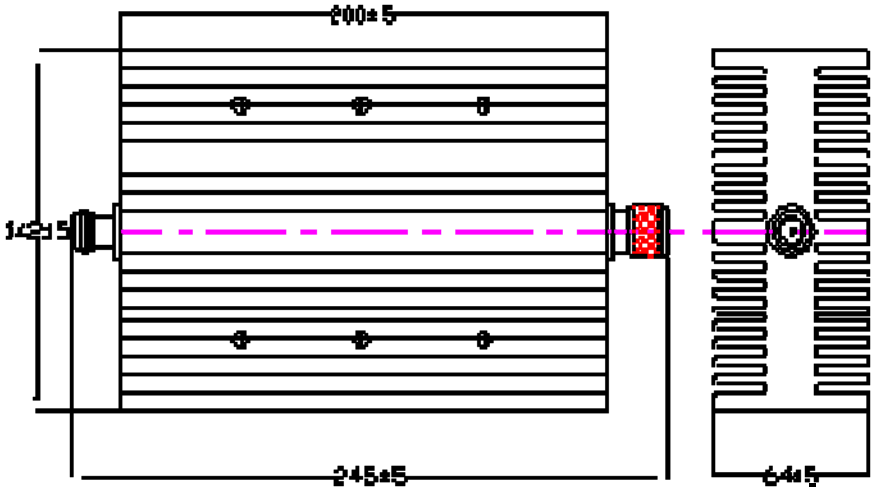

Units: mm
Not to scale

Order Examples: RATTN-DC-3.0-20d-Nm-Nf-200W-v14
Description: (Attenuator, DC-3.0GHz, 20dB Attenuation, N-Male to N-Female Connectors, 200 Watts)

Specifications									Units
Operating Frequency	DC-3.0								GHz
Impendence	50								Ohm
VSWR	≤1.20:1								
Application	Indoor								
Average Power	200								Watts
Attenuation	3	6	10	20	30	40	50	60	dB
Tolerance	±0.5	±0.5	±0.8	±1.0	±1.2	±2.0	±2.5	±3.0	dB
Operating Temperature	-40 ~ +80								°C
Connectors	Nm-Nf								(max)
Connector Material	Brass								
Outer Contact Plating	Black								

WORLD HQ: 1702L Meridian Ave. Suite 127, San Jose, Ca 95125, U.S.A.
Tel: (408) 266-7404 FAX: (408) 266-4483
WEB: www.raditek.com E-mail: sales@raditek.com