


# RADITEK INC.

## Ceramic Band Pass Filter

code-k

1389 MHz to 1411 MHz, Model 0806, 5 Watts, Surface Mount  
RBPF-1389-1411M-0806-5W-S-k

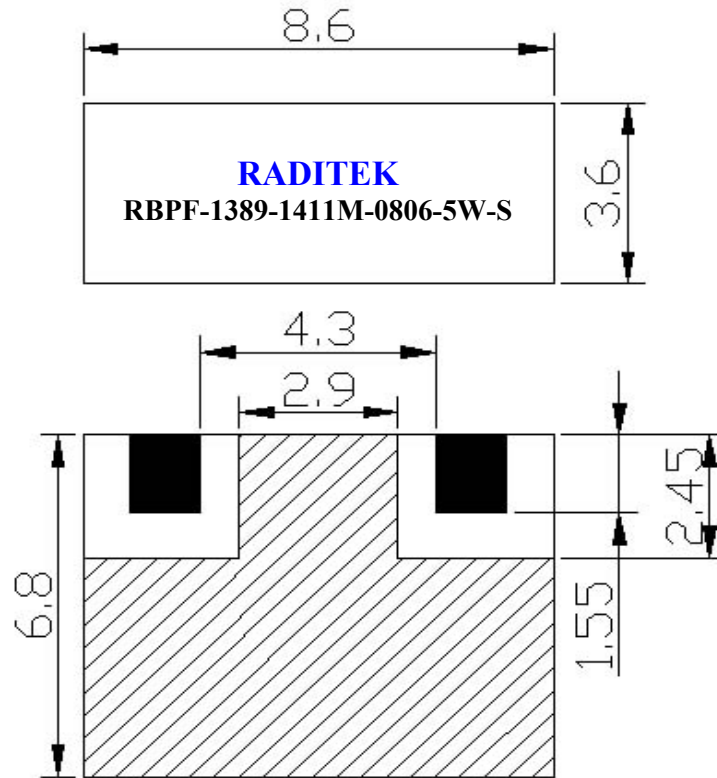

Specifications		Units
Center Frequency	1400	MHz
Bandwidth (BW)	$F_0 \pm 11$ (1389-1411)	MHz
Insertion Loss	1.5	dB max Typ/Spec
Ripple in BW	0.5	dB max Typ/Spec
Return Loss in BW	15	dB min Typ/Spec
Attenuation	35dB min at 1000 35dB min at 1750	MHz MHz
Input Power	5	Watt
In/Out Impedance	50	$\Omega$
Operating Temp.	-40 to +85°	Deg C

RBPF-1389-1411M-0806-5W-S-k **Specifications may be subject to change**

05/19/08

WORLD HQ: 1702L Meridian Ave. Suite 127, San Jose, Ca 95125, U.S.A.

Telephone: (408) 266-7404 FAX: (408) 266-4483

WEB: [www.raditek.com](http://www.raditek.com), E-mail: [sales@raditek.com](mailto:sales@raditek.com)