RADITEK INC.

code-b

COAXIAL ISOLATOR, 39-41MHz, N connectors, 100 Watt

RADI-39-41M-N3-100WR-b

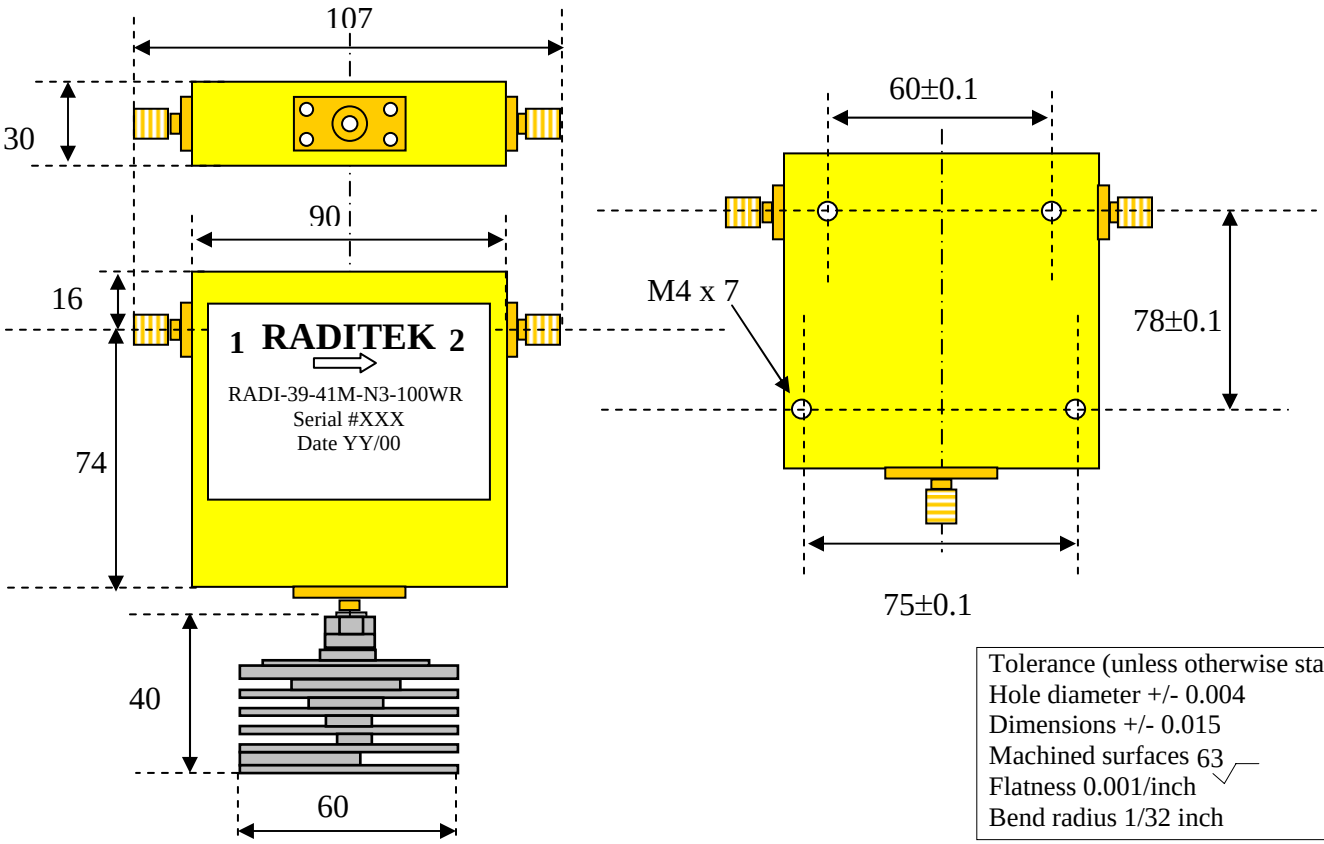

Tolerance (unless otherwise stated):
Hole diameter +/- 0.004
Dimensions +/- 0.015
Machined surfaces 63
Flatness 0.001/inch
Bend radius 1/32 inch

Direction of RF:	
R	Default
L	

Units: mm
Not to scale

Order Examples: RADI-39-41M-N3-100WR
I=ISOLATOR / C=CIRCULATOR

N / SMA Connector options (X)				
Isolator			Circulator	
Port 1	Port 2		Port 3 Male	Port 3 Female
Female	Male	-1	-11	-21
Male	Female	-2	-12	-22
Female	Female	-3	-13	-23
Male	Male	-4	-14	-24

Electrical Specifications		Units
Frequency:	39-41	MHz
Insertion Loss	1.0	dB (max)
Isolation	17	
VSWR	1.35	:1
Power (Fwd/Rev)	100	Watts (max)
Temperature Range	+15 to +35	ºC

WORLD HQ: 1702H Meridian Ave. Suite 127, San Jose, Ca 95125, U.S.A.
Telephone: (408) 266-7404 FAX: (408) 266-4483
WEB: www.raditek.com , E-mail: sales@raditek.com