


Cavity Band Pass Filter, 2000-2090 MHz SMA Female Connectors, 20 Watts

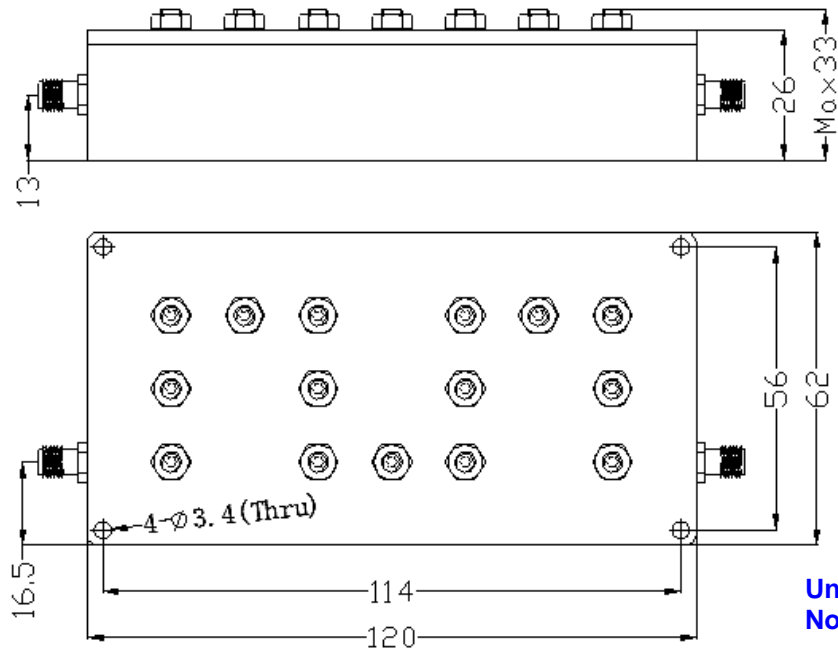

**Units: mm
Not to scale**

Order Examples: RCBPF-2000-2090M-Sf-20W-c14

Description: (Cavity Band Pass Filter, 2000-2090 MHz, SMA Female Connectors, 20 Watts)

Specifications	
Center Frequency (F0)	2045MHz
Bandwidth	90MHz (2000-2090MHz)
Pass Bands Insertion Loss	≤1.0dB
Pass Bands Return Loss	≥20dB
Stop Band Rejection	≥40dB @ Fc±30MHz (DC-1970MHz, 2120-5000MHz)
Impedance	50 ohms
Surface Finish	Black Paint
Power Handling	≤20W
Connectors	SMA-Female