


## Cavity Band Pass Filter, 5.26-5.30 GHz SMA Female Connectors, ≤ 10 Watts

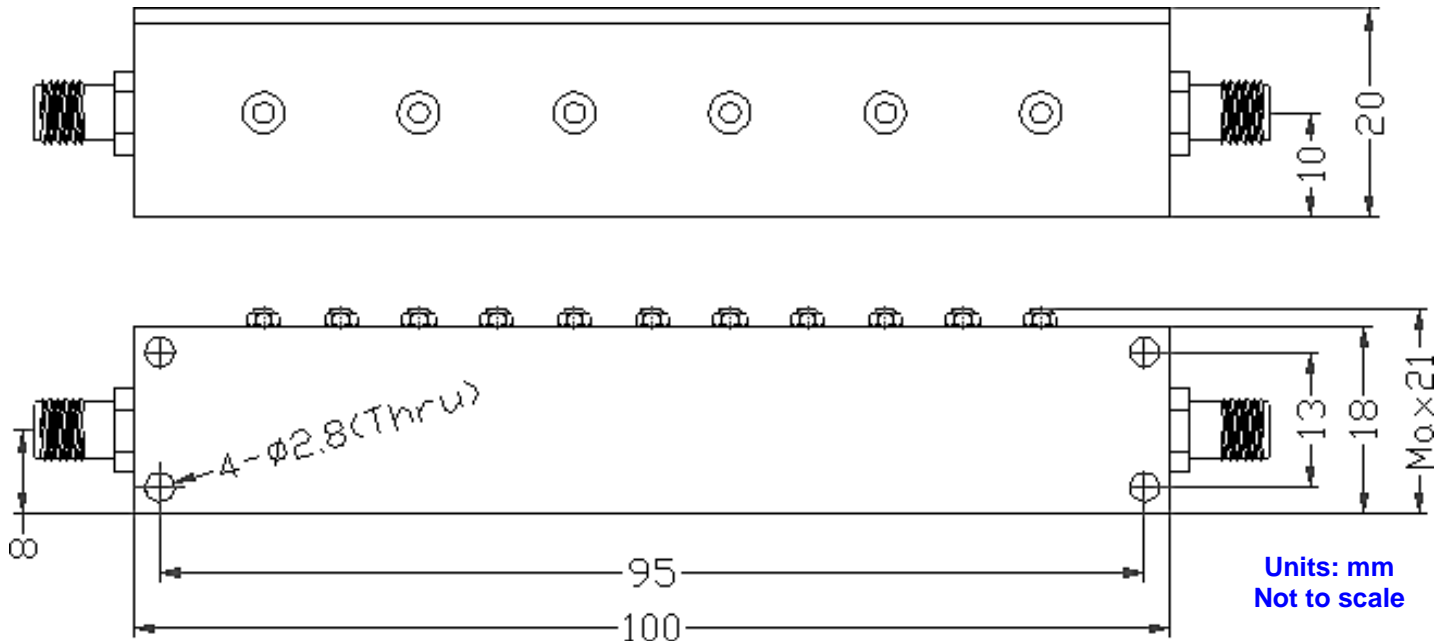

**Order Examples:** RCBPF-5.26-5.30-Sf-10W-c14

**Description:** (Cavity Band Pass Filter, 5.26-5.30GHz, SMA Female Connectors, 10Watts)

Specifications	
Center Frequency (F0)	5.280GHz
Bandwidth	±20MHz (5.260~5.300GHz)
Pass Band Insertion Loss	≤1.5 dB
Pass Band VSWR	≤1.3:1
Stop Band Rejection	≥60dB @ DC~5160MHz ≥60dB @ 5400~12000MHz
Impedance	50 ohms
Power Handling	≤10W
Temperature Range	-30°C to +75°C
Surface Finish	Black Paint
Connectors	SMA-Female