


Cavity Diplexer, 1710-1785 MHz / 1805-1880 MHz (N Or SMA) Female Connectors, 50 Watts Input Power

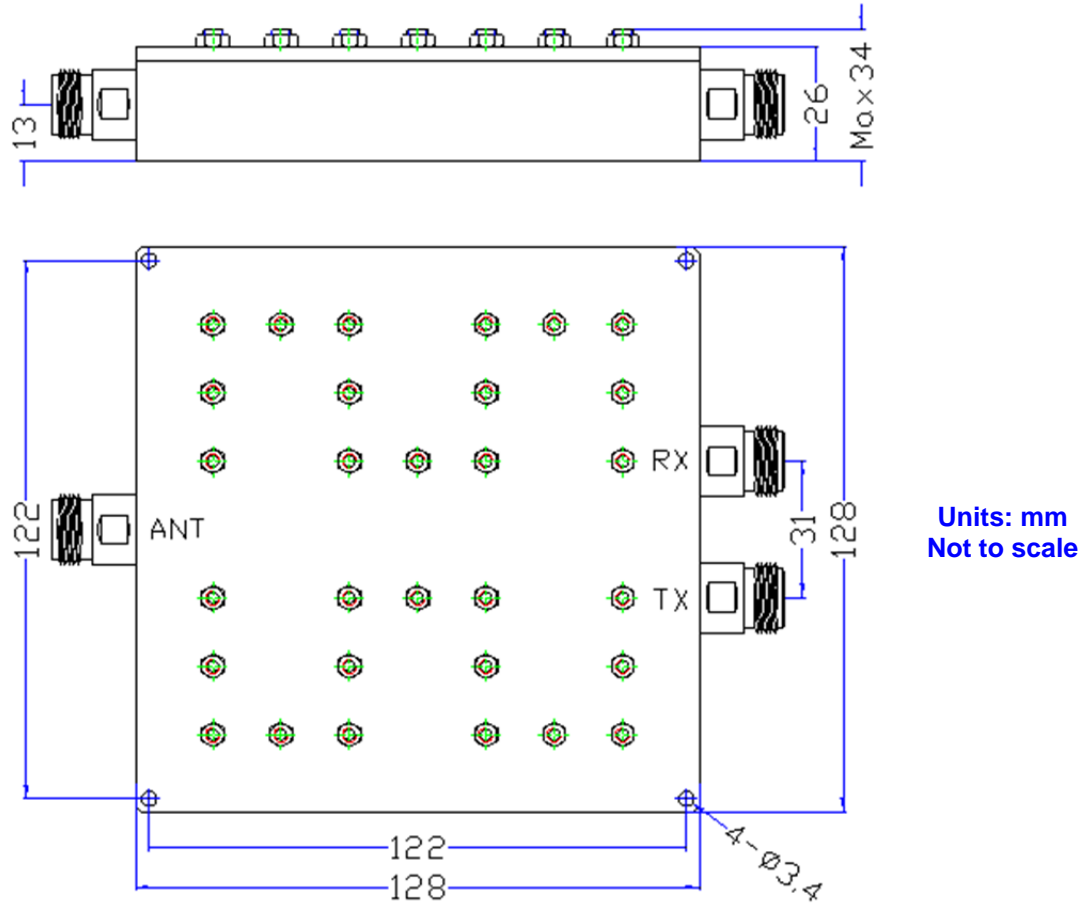

Order Examples: RCDIPL-1710-1785M-1805-1880M-Nf-50W-c14

Description: (Cavity Diplexer, 1710-1785MHz / 1805-1880MHz, N Female Connectors, 50Watts)

Additional Option SMA Female

Parameters	RX	TX
Frequency Range	1710-1785 MHz	1805-1880 MHz
Insertion Loss	≤1.0 dB	≤1.0 dB
Ripple	≤0.8 dB	≤0.8 dB
VSWR	≤1.4:1	≤1.4:1
Rejection	≥60 dB @ 1805-1880 MHz	≥60 dB @ 1710-1785 MHz
Power	50 W	
Impedance	50 ohms	
Surface Finish	Black Paint	
Connectors	SMA-Female or N Female	
Port Sign	Port1 : ANT ; Port 2: RX ; Port 3: TX	