


RADITEK INC.

Cavity Diplexer, 4400-4625MHz / 4775-5000MHz SMA Female Connectors, 30 Watts Continuous RCDIPL-4400-4625M/4775-5000M-SMA(f)-30W

code-k

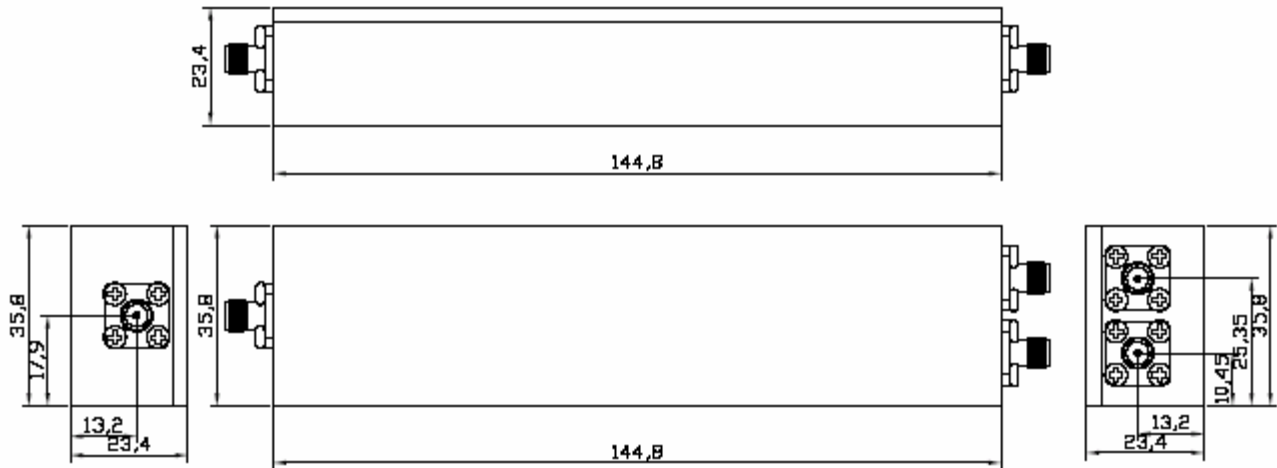

Without Screw

Unit: mm

| | | |
|----------------------------|--|---------------|
| Frequency Range | 4400~4625 MHz | 4775~5000 MHz |
| Number of Input Ports | 1 | |
| Number of Output Ports | 2 | |
| Input Connector Type | SMA type (Female) | |
| Output Connector Type | SMA type (Female) | |
| Impedance | 50 ohm | |
| Insertion Loss | ≤ 1.25dB | |
| VSWR | ≤ 1.5:1 | |
| Rejection | > 70 dB Low 0~4100 MHz / 4775~10000MHz High 0~4625 MHz / 5300~10000MHz | |
| Input Power CW | Max. 30W | |
| Temperature Range | - 32 ~ + 70 °C | |
| Dimension(Less Connectors) | 144.8 * 35.8 * 23.4 mm | |
| Weight | About 0.7kg | |

Vibration Operation :>=60 grms, 20-2000 Hz TBC