


RADITEK INC.

Cavity Diplexer 876-915M Tx/ 921-960M Rx RCDIPL-876-915M/921-960M-SMA(f)-3W

code-k

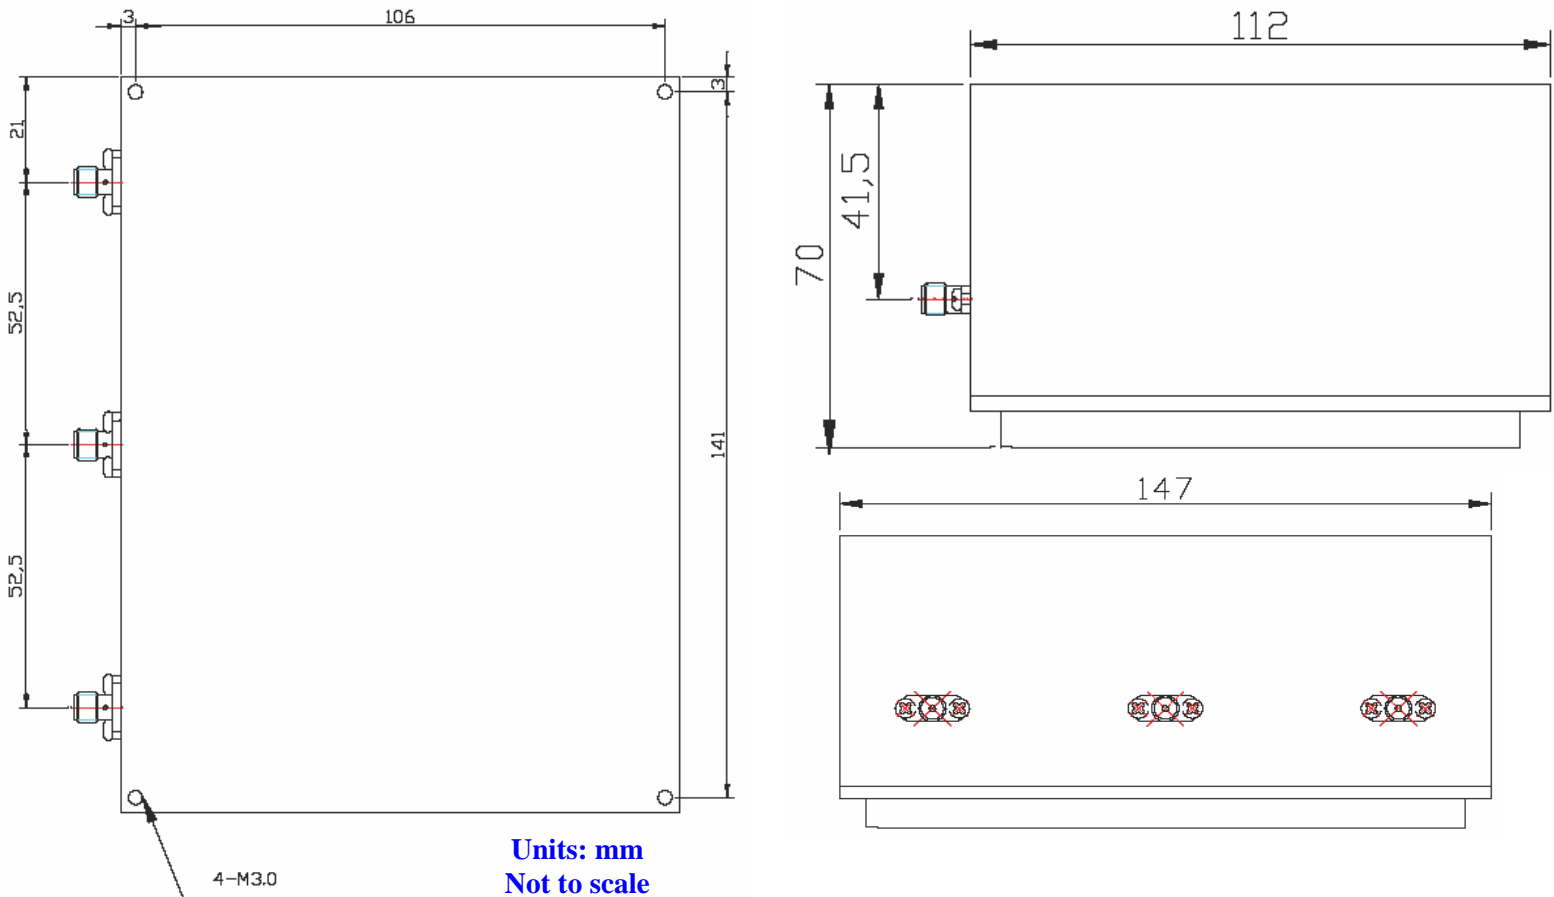

Specifications Parameter	Units	Raditek Low Pass	Raditek High Pass
Pass Band Range	MHz	876-915	921-960
Band Width	MHz	39	39
Pass Band Insertion loss	dB		2.0
Pass Band Ripple	dB		0.8
Pass Band Return loss	dB		18
Isolation (RX-TX: ANT Term)	dB		30
Attenuation			
921~960Mhz	dBc (min)		30
876~915MHz	dBc (min)		30
In/Out Impedance	Ohm		50
Power	W(CW)		3
In/Out Port Connectors	SMA		Female (4 Hole)
Operating Temperature	°C		-20 to +70
Size	mm	147 x 70 x 112	

RCDIPL-876-915M+921-960M-SMA(f)-3W-k

Specifications may be subject to change

01/17/07

WORLD HQ: 1702H Meridian Ave. Suite 127, San Jose, Ca 95125, U.S.A.

Telephone: (408) 266-7404 FAX: (408) 266-4483

WEB: www.raditek.com, E-mail: sales@raditek.com