


Triplexer, Cavity Filter, 902-1805-2100MHz,
N Female Connectors, 15Watts

RCTRIP-902-1805-2100M-Nf-15W-k

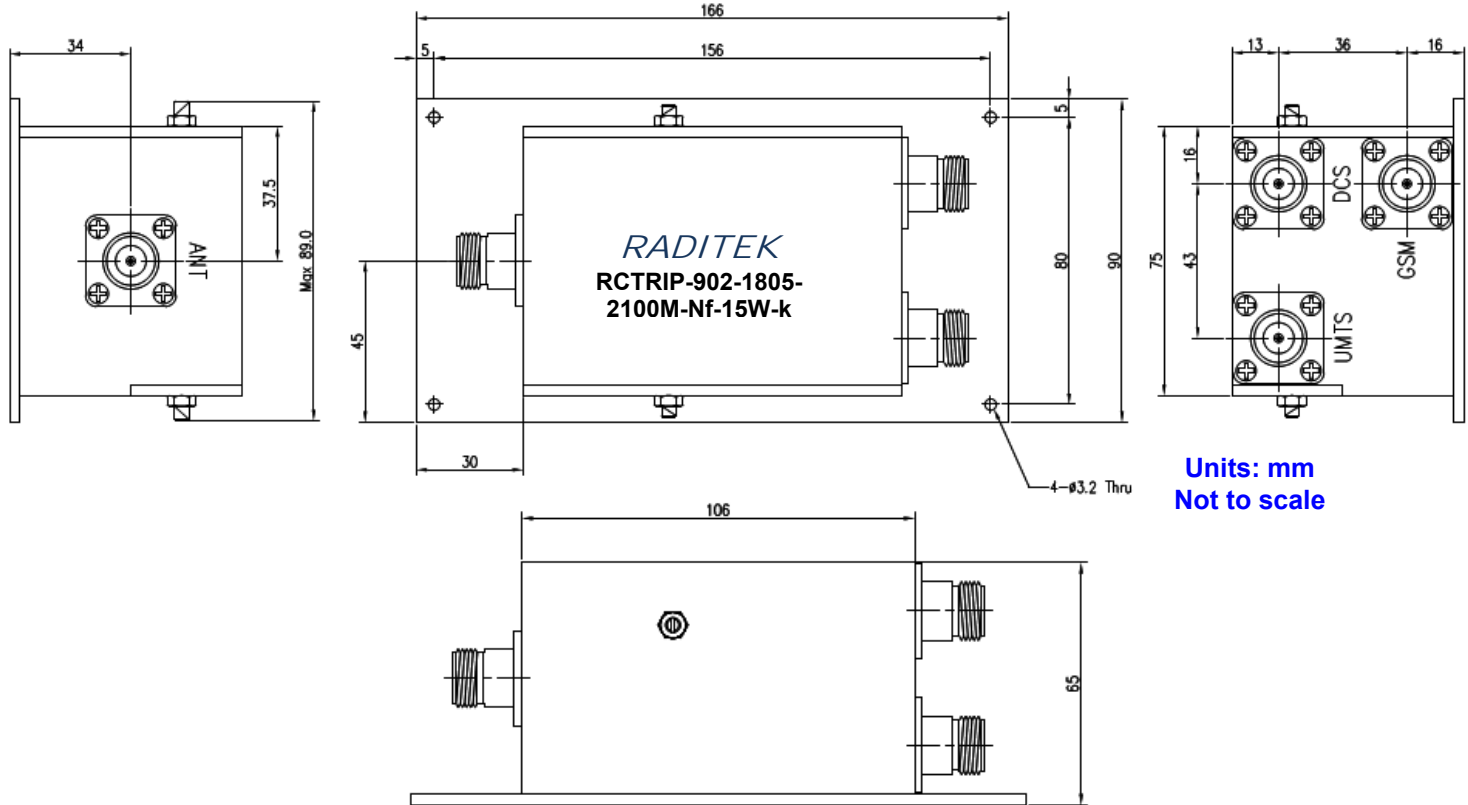

Electrical Specifications:	CH1	CH2	CH3
Frequency Band	902~960MHz	1805~1880MHz	2110~2170MHz
Pass Bandwidth	58MHz	75MHz	60MHz
Insertion Loss		0.5 dB max.	
Ripple		0.3 dB max.	
Return loss		18 dB min.	
In, Out Impedance		50 Ω	
Input Power		15W (Max)	
Attenuation	30dBc Min @1805~2170MHz	30dBc Min @ 902~960MHz 30dBc Min @2110~2170MHz	30 dBc Min @902~1880MHz
Operation Temp. Range		-20°C ~ +70°C	
Connector		N-Type Female	