RADITEK INC.

RoHS COMPLIANT

code-r25

Isolator-Isolator, Coaxial, Double Junction, 130-180 MHz

SMA Connectors, 100 Watts Forward, 20 Watts Reverse Power

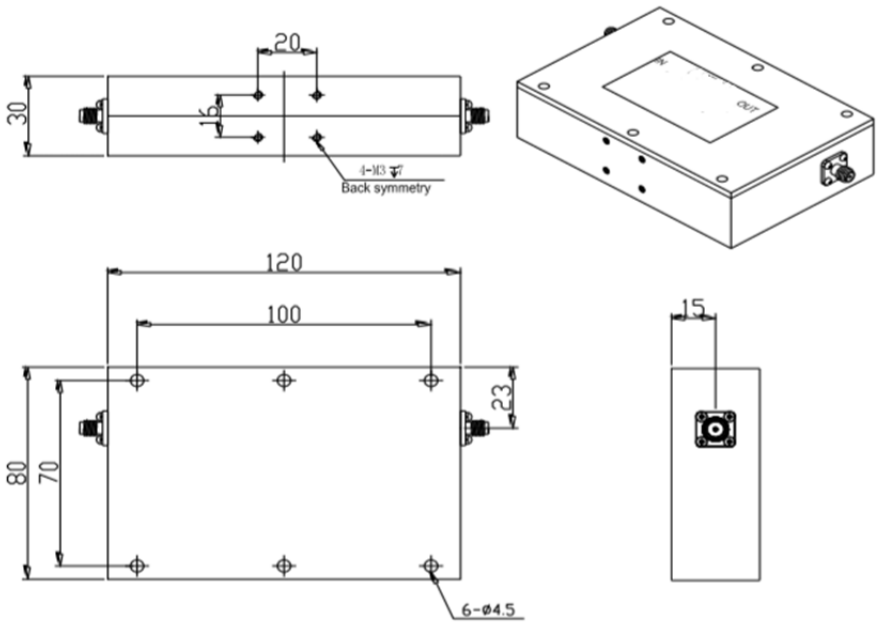

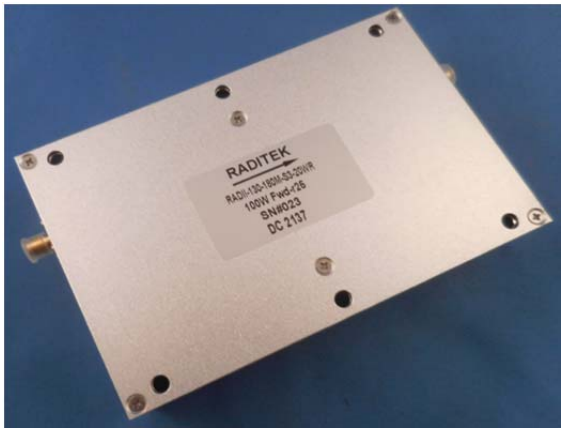

Units: mm
General part Tolerance is ±2% unless otherwise stated.

Direction of RF:	
R	Default ▶
L	◀

Order Examples: RADII-130-180M-S3-20WR-100W Fwd-r25
II=ISOLATOR- ISOLATOR

SMA Connector options (X)				
Isolator			Circulator	
Port 1	Port 2		Port 3 Male	Port 3 Female
Female	Male	-1	-11	-21
Male	Female	-2	-12	-22
Female	Female	-3	-13	-23
Male	Male	-4	-14	-24

Specifications:

Frequency MHz	Insertion loss dB (max)	Isolation dB (min)	VSWR (max)	Forward Power Watt CW (max)	Reverse Power Watts (max)	Operating Temp °C	Connector
130-180	1.6	38	1.30:1	100	20	-10 to +60	SMA

WORLD HQ: 1702L Meridian Ave. Suite 127, San Jose, Ca 95125, U.S.A.
Tel: (408) 266-7404 FAX: (408) 266-4483
WEB: www.raditek.com E-mail: sales@raditek.com