ROHS Compliant

RADITEK INC.

code b

Coaxial Circulator, 26.5-27.5MHz, N-Connectors, 10Watts (30W Forward)
RADC-26.5-27.5M-N23-10WR (30W FWD)

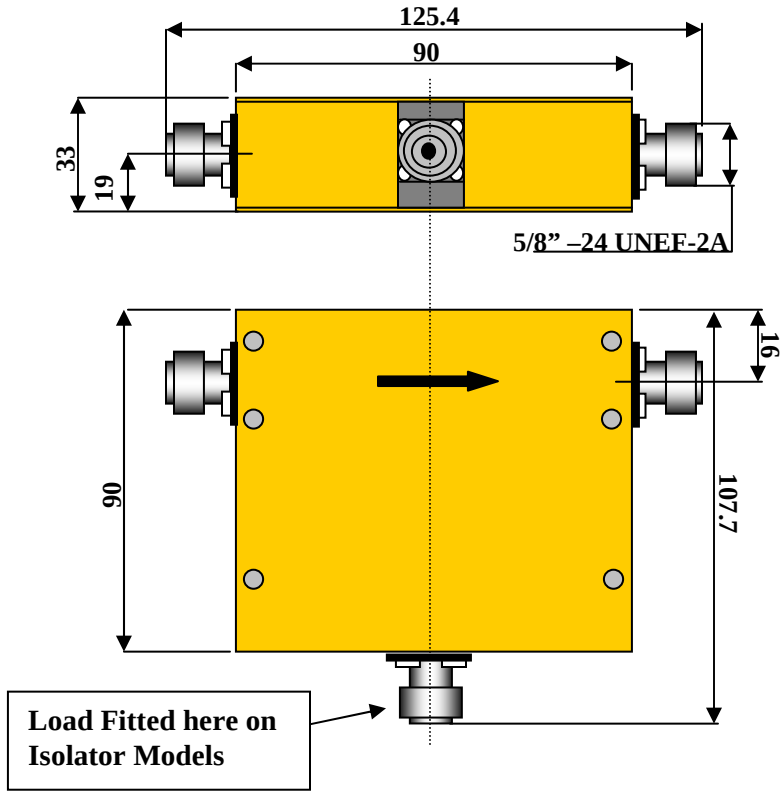

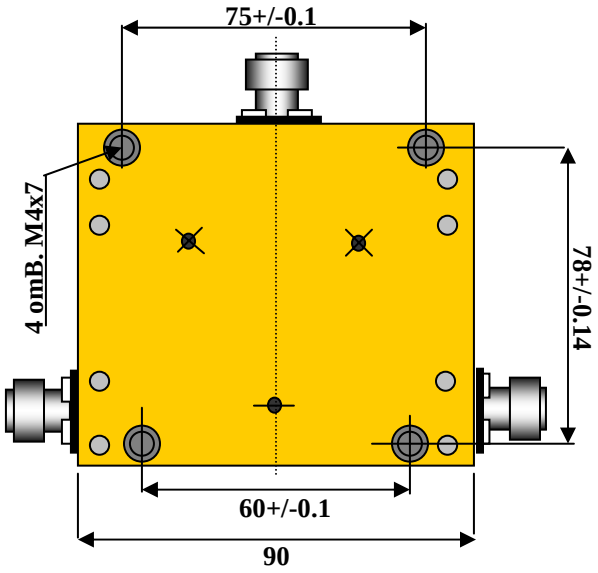

Direction of RF:	
R	Default
L	

Units: mm(Inch)
Not to scale

N / SMA Connector options (X)				
Isolator			Circulator	
Port 1	Port 2		Port 3 Male	Port 3 Female
Female	Male	-1	-11	-21
Male	Female	-2	-12	-22
Female	Female	-3	-13	-23
Male	Male	-4	-14	-24

Order Examples: RADI-F1-F2M-SX-1WR
I=ISOLATOR / C=CIRCULATOR

Specifications:		Units
Frequency	26.5-27.5	MHz
Insertion loss	1.0	dB
Isolation	17	dB
VSWR	1.3	
Power Forward	30	Watt
Power Reverse	10	Watt
Temperature range	0 to +50	°C
Connector	N-type	

WORLD HQ: 1702H Meridian Ave. Suite 127, San Jose, Ca 95125, U.S.A.
Telephone: (408) 266-7404 FAX: (408) 266-4483
WEB: www.raditek.com , E-mail: sales@raditek.com