


Coaxial Isolator, 6.4-7.4GHz, Split Bands N-Type Connector, 15 Watts, (150 Watts Forward) RADI-f1-f2-N3-15WR(150W Fwd)

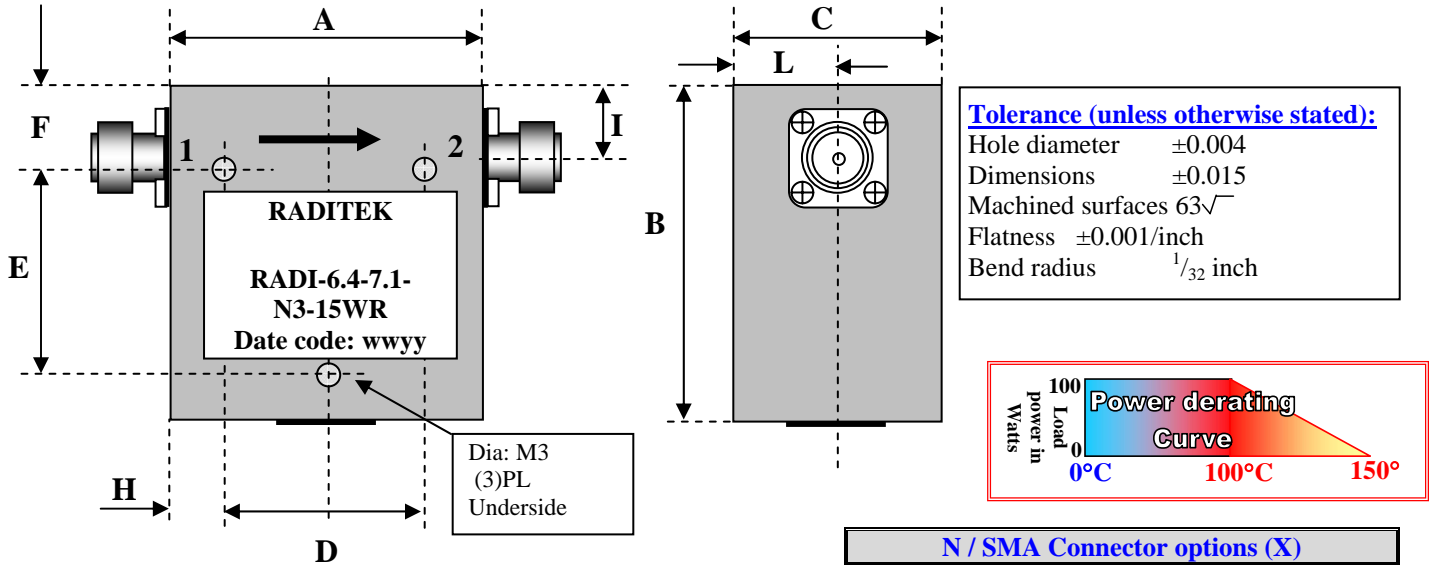

Direction of RF:	
R	Default
L	

Units: mm
Not to scale

Order Examples: RADI-6.4-7.1-N3-15WR(150W Fwd)
I=ISOLATOR / C=CIRCULATOR

N / SMA Connector options (X)				
Isolator			Circulator	
Port 1	Port 2		Port 3 Male	Port 3 Female
Female	Male	-1	-11	-21
Male	Female	-2	-12	-22
Female	Female	-3	-13	-23
Male	Male	-4	-14	-24

Size#	A	B	C	D	E	F	H	I	L	
1	45.8	45.2	24.4	35.0	25.5	14.8	tba	15.5	tba	mm
										mm

Size#	Specifications: Frequency GHz	Insertion loss dB (max)	Isolation dB (min)	VSWR :1	Power Fwd Watts	Power Rev Watts	Temp °C	Connector
1	6.4-7.1	0.4 0.6	18 15	1.35 1.45	150	15	+25 -60 to +70	N-Type
1	7.1-7.4	0.4 0.6	18 15	1.35 1.45	150	15	+25 -60 to +70	N-Type