

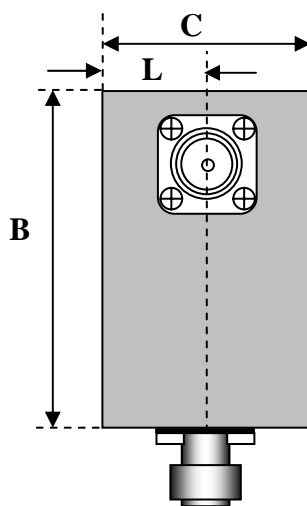


Coaxial Circulator or Isolator, 600-700MHz N-Type Connector, 200 Watts Average, 2kW Pulse

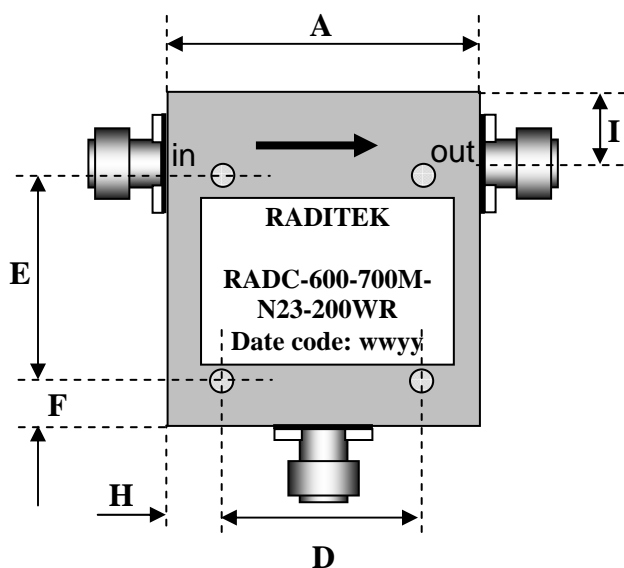

Tolerance (unless otherwise stated):
 Hole diameter +/- 0.004
 Dimensions +/- 0.015
 Machined surfaces 63
 Flatness 0.001/inch
 Bend radius 1/32 inch

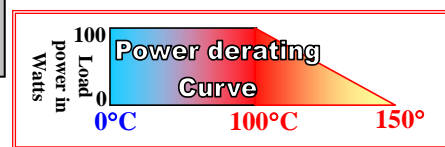

Direction of RF:	
R	Default
L	

Units: mm
Not to scale

Order Examples: RADC-600-700M-N23-200WR(2kW Pulse)
I=ISOLATOR / C=CIRCULATOR

N Connector options (X)				
Isolator			Circulator	
Port 1	Port 2		Port 3 Male	Port 3 Female
Female	Male	-1	-11	-21
Male	Female	-2	-12	-22
Female	Female	-3	-13	-23
Male	Male	-4	-14	-24

Size#	A	B	C	D	E	F	H	I	L	
1	75	75	25	tba	tba	tba	tba	tba	tba	mm

Size#	Specifications: Frequency MHz	BW	Insertion loss dB (max)	Isolation dB (min)	VSWR :1	Power Average Watts	Power Impulse kWatts	Op.Temp °C	Connector
1	600-700	Full	tba	23	tba	200	2	tba	N-type