



**Coaxial Isolator, 540-640MHz
SMA Connector, 1 Watt
RADI-540-640M-S3-1WR**

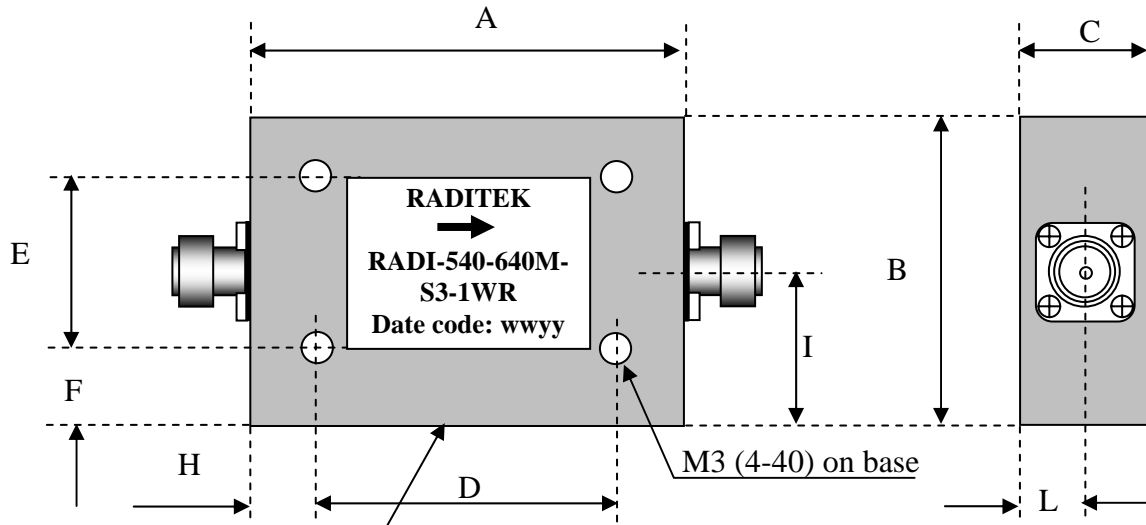

Connector fitted here on Circulator Models



Units: mm
Not to scale.

Order Examples: **RADI-540-640M-S3-1WR**
I=ISOLATOR / C=CIRCULATOR

SMA Connector options (X)				
Isolator		Circulator		
Port 1	Port 2		Port 3 Male	Port 3 Female
Female	Male	-1	-11	-21
Male	Female	-2	-12	-22
Female	Female	-3	-13	-23
Male	Male	-4	-14	-24

Size#	A	B	C	D	E	F	H	I	L	
1	54.0	43.0	18.5	38.0	15.0	12.5	8.0	20.0	12.0	mm
										mm

Size#	Specifications: Frequency MHz	Insertion loss dB (max)	Isolation dB (min)	VSWR :1	Power Fwd Watts	Power Rev Watts	Temp Range °C	Connector
1	540-640	0.4	20	1.25	1	1	-40 to +70	SMA