



Coaxial Circulator, 1000-1100MHz N-Type Connector, 200 Watts, 2 kilowatt Peak RADC-1000-1100M-N23-200WR(2kW Peak)

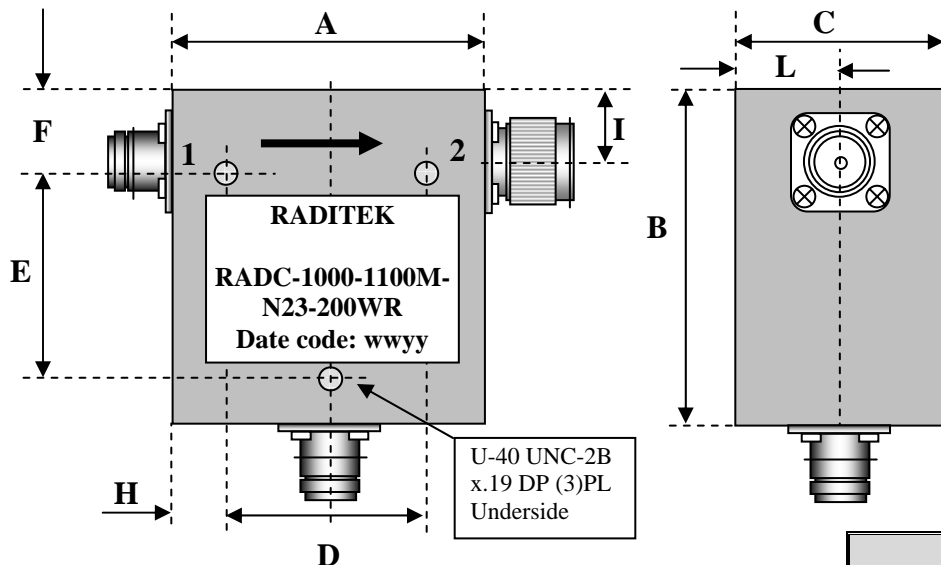

Tolerance (unless otherwise stated):

Hole diameter	±0.004
Dimensions	±0.015
Machined surfaces	63√
Flatness	±0.001/inch
Bend radius	1/32 inch

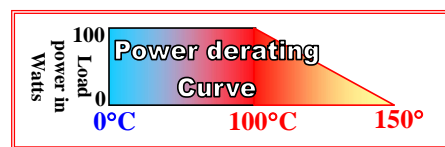

U-40 UNC-2B
x.19 DP (3)PL
Underside

Direction of RF:

R	Default	
L		

Units: mm
Not to scale

Order Examples: RADC-1000-1100M-N21-200WR(2kW Peak)
I=ISOLATOR / C=CIRCULATOR

N / SMA Connector options (X)				
Isolator			Circulator	
Port 1	Port 2		Port 3 Male	Port 3 Female
Female	Male	-1	-11	-21
Male	Female	-2	-12	-22
Female	Female	-3	-13	-23
Male	Male	-4	-14	-24

Size#	A	B	C	D	E	F	H	I	L	
1	40.9	35	26.6	tba	tba	tba	tba	tba	tba	mm
										mm

Size#	Specifications: Frequency MHz	Insertion loss dB (max)	Isolation dB (min)	VSWR :1	Power Avg. Watts	Power Peak kWatts	Temp °C	Connector
1	1000-1100	0.3	20	1.2	200	2	-20 to +80	N-Type