



Coaxial Circulator, 1200-1400MHz, 200Watts Average, 1Kilo Watt Peak Power, N-Type Female Connectors

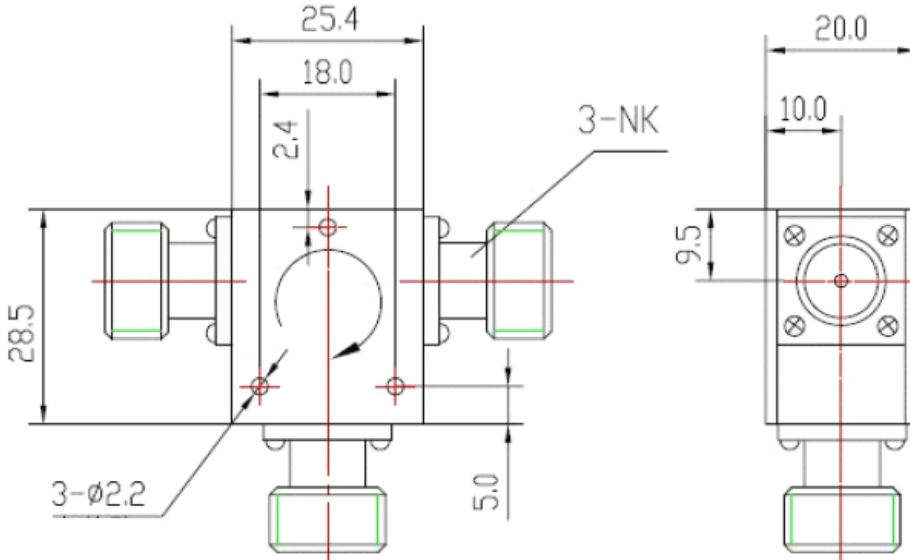

Units: mm
Not to scale

<p>Tolerance Table Metric (inch) (unless otherwise stated): Hole diameter +/- 0.1mm, (+/- 0.004") Dimensions (w*h) +/- 0.3 mm, (+/- 0.015") Machined surfaces Flatness 0.025/mm, (0.001/ inch) Bend radius 0.8mm, (0.031" or 1/32")</p>

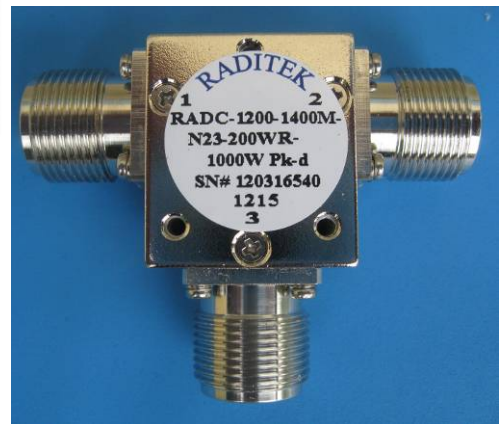

Direction of RF:	
R	Default ▶
L	◀

Order Examples: RADC-1200-1400M-N23-200WR-1kW Pk-d
C=CIRCULATOR

N Connector options (X)			
Circulator			
Port 1	Port 2	Port 3 Male	Port 3 Female
Female	Male	-11	-21
Male	Female	-12	-22
Female	Female	-13	-23
Male	Male	-14	-24

Frequency MHz	Insertion loss dB (max)	Isolation dB (min)	VSWR :1	Average Power Watts	Peak Power Kilo Watts	Operating Temp °C	Connector
1200-1400	0.35	20	1.25	200	1	-30 to +70	N