


**Coaxial Isolator or Circulator, 1350-1850MHz
SMA Connector, 50 Watts
RADI-1350-1850M-S3-50WR
RADC-1350-1850M-S23-50WR**

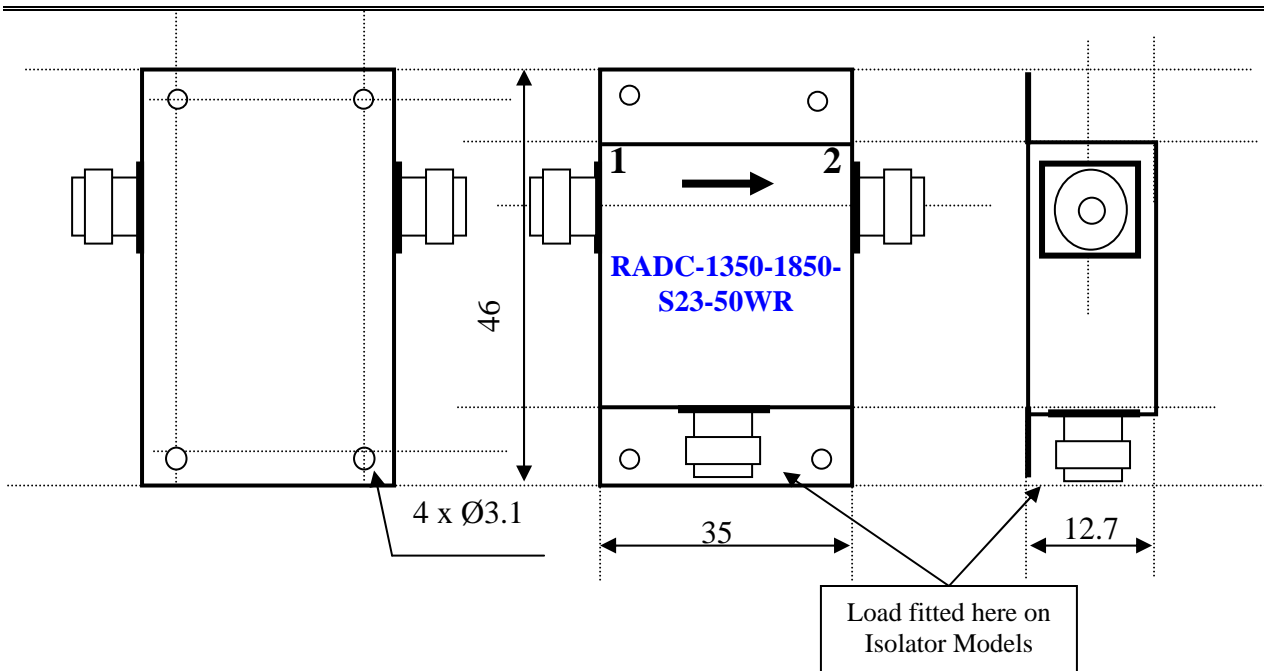

Direction of RF:	
R	Default
L	

Units: mm
Not to scale

Order Examples: **RADI-1350-1850M-S3-50WR**
I=ISOLATOR / C=CIRCULATOR

N / SMA Connector options (X)				
Isolator			Circulator	
Port 1	Port 2		Port 3 Male	Port 3 Female
Female	Male	-1	-11	-21
Male	Female	-2	-12	-22
Female	Female	-3	-13	-23
Male	Male	-4	-14	-24

Specifications:	1350-1850	MHz
Insertion loss	0.8	dB (maximum)
Isolation	15	dB (minimum)
VSWR	1.5	Maximum
Rated power (forward)	50	Watts (average)
Rated power (reverse)	50	Watts (average)
Operating temperature	-50 to +70	°C