ROHS Compliant

RADITEK INC.

code-c

Coaxial Isolator, 2.8-2.9GHz
N-Type Connector, 10 Watts
RADI-2.8-2.9-N3-10WR

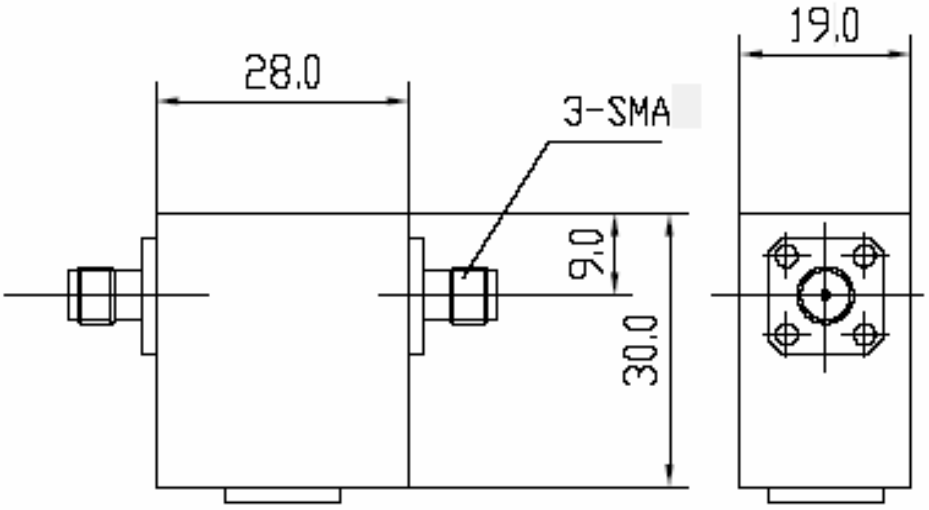

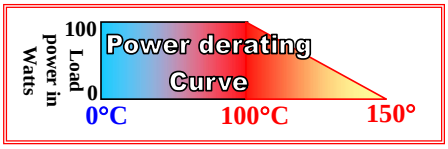

Direction of RF:	
R	Default
L	

Units: mm
Not to scale

Order Examples: RADI-2.8-2.9-N3-10WR
I=ISOLATOR / C=CIRCULATOR

N / SMA Connector options (X)				
Isolator			Circulator	
Port 1	Port 2		Port 3 Male	Port 3 Female
Female	Male	-1	-11	-21
Male	Female	-2	-12	-22
Female	Female	-3	-13	-23
Male	Male	-4	-14	-24

Specifications: Frequency GHz	Insertion loss dB (max)	Isolation dB (min)	VSWR :1	Power Fwd Watts	Power Rev Watts	Temp °C	Connector
2.8-2.9	0.3	20	1.20	60 600 Peak	10 300 Peak	0 to 60	SMA

WORLD HQ: 1702L Meridian Ave. Suite 127, San Jose, Ca 95125, U.S.A.
Telephone: (408) 266-7404 FAX: (408) 266-4483
WEB: www.raditek.com , E-mail: sales@raditek.com