
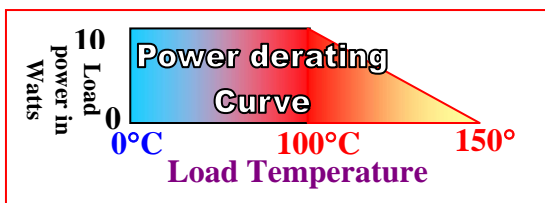


**Coaxial Circulator, 900-928MHz
dd1 Package, SMA Connector, 100 Watts
RADC-900-928M-dd1-S23-100WR**

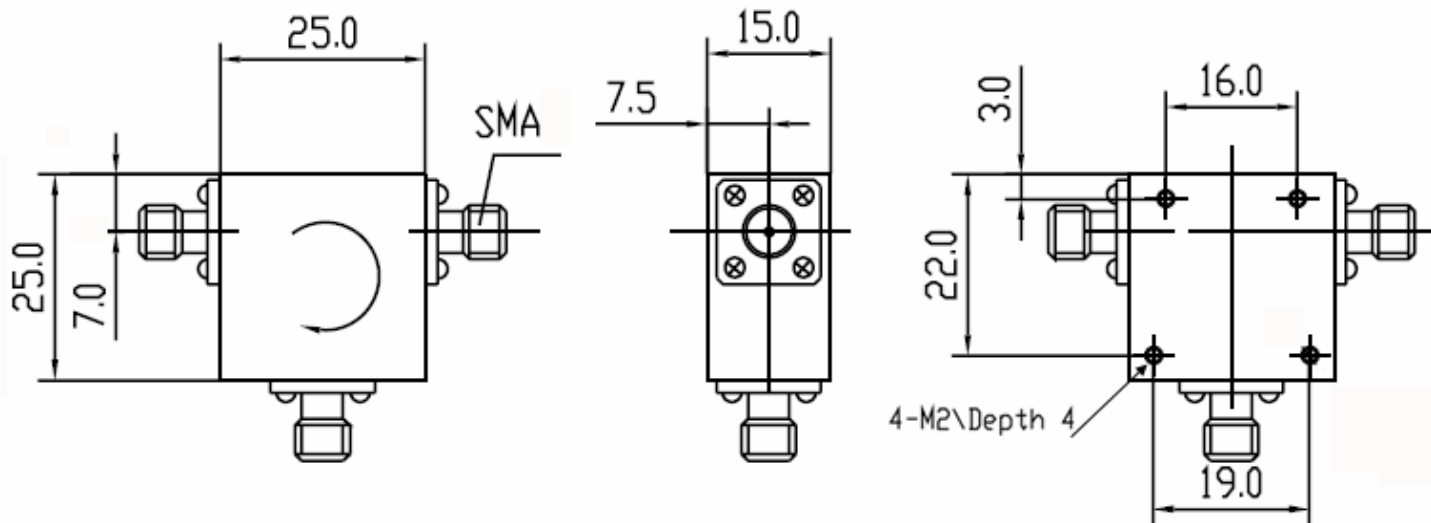

Direction of RF:		
R	Default	
L		

Units: mm
Not to scale

Order Examples: **RADC-900-928M-dd-S23-100WR**
I=ISOLATOR / C=CIRCULATOR

N / SMA Connector options (X)				
Isolator			Circulator	
Port 1	Port 2		Port 3 Male	Port 3 Female
Female	Male	-1	-11	-21
Male	Female	-2	-12	-22
Female	Female	-3	-13	-23
Male	Male	-4	-14	-24

Specifications: Frequency MHz	Insertion loss dB (max)	Isolation dB (min)	VSWR :1	Power Fwd Watts	Power Rev Watts	Temp °C	Connector
900-928	0.25	22	1.15	100	100	-30 to +70	SMA