



## Coaxial Circulator, 925-950MHz N-Type Connector, 300 Watts RADC-925-950M-N23-300WR

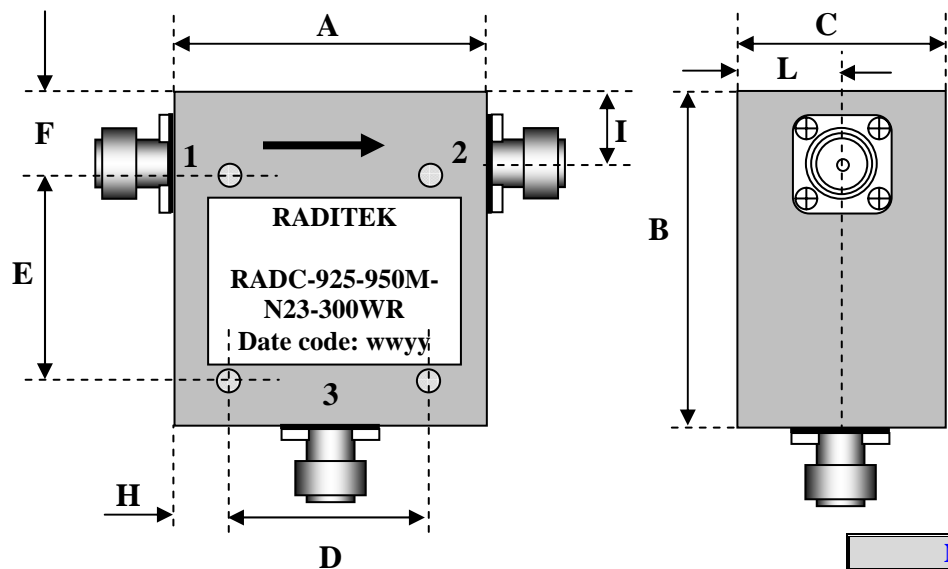

**Tolerance (unless otherwise stated):**

Hole diameter	±0.004
Dimensions	±0.015
Machined surfaces	63√
Flatness	±0.001/inch
Bend radius	1/32 inch

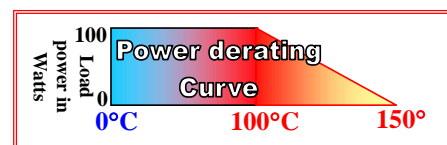

**Direction of RF:**

<b>R</b>	Default	
<b>L</b>		

Units: mm  
Not to scale

Order Examples: **RADC-925-950M-N23-300WR**  
**I=ISOLATOR / C=CIRCULATOR**

N / SMA Connector options (X)				
Isolator			Circulator	
Port 1	Port 2		Port 3 Male	Port 3 Female
Female	Male	-1	-11	-21
Male	Female	-2	-12	-22
Female	Female	-3	-13	-23
Male	Male	-4	-14	-24

Size#	A	B	C	D	E	F	H	I	L	
1	35	40.9	26.6	tba	tba	tba	tba	tba	tba	mm
										mm

Size#	Specifications: Frequency MHz	Insertion loss dB (max)	Isolation dB (min)	VSWR :1	Power Fwd Watts	Power Rev Watts	Temp °C	Connector
1	925-950	0.25	27	1.15	300	300	+25	N-Type