


## Double Junction, Coaxial Isolator, 850-869MHz, F1, 150 Watts

Superior performance at high power

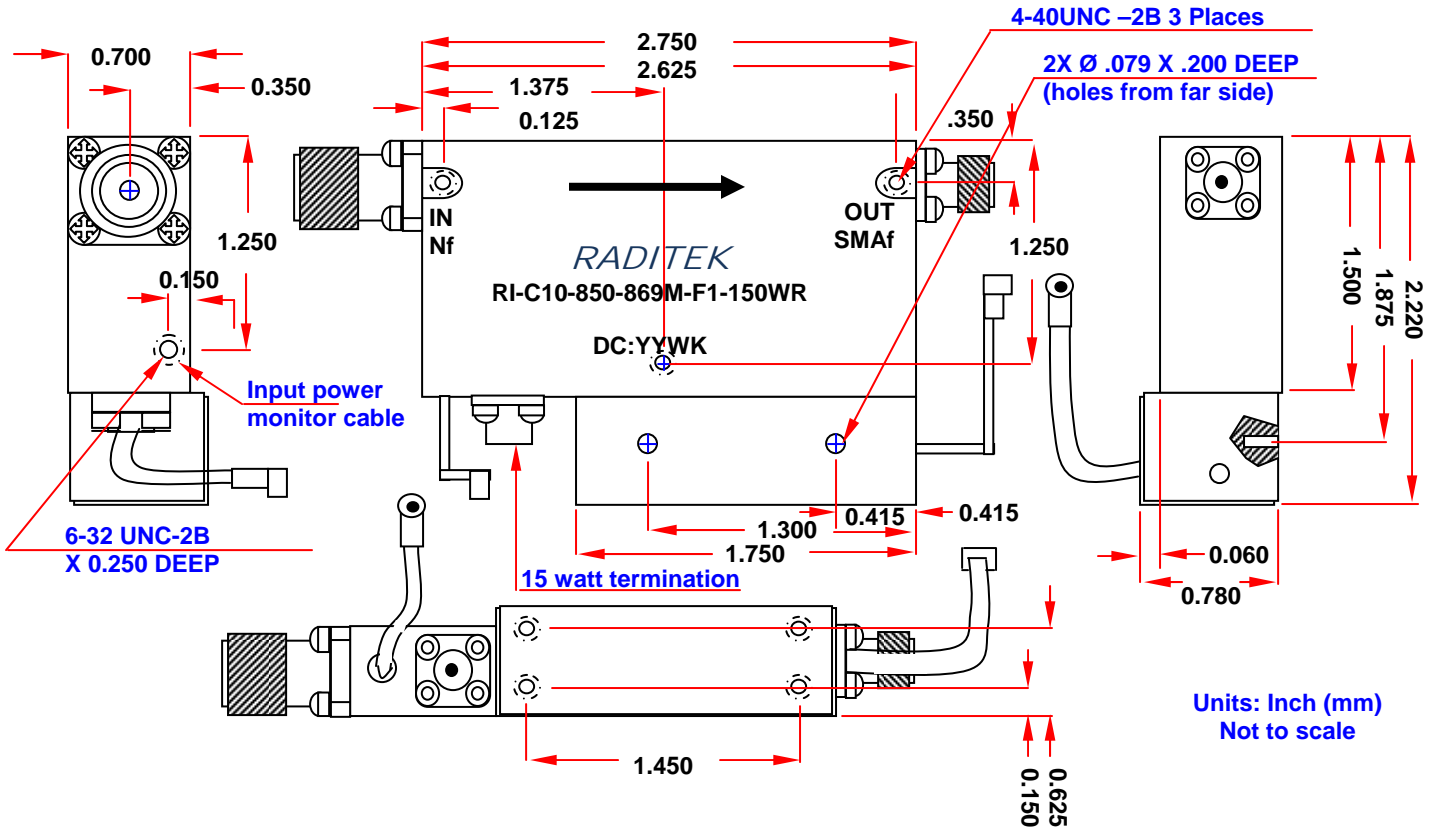

Order Examples: RI-C10-850-869M-F1-150WR  
**I=ISOLATOR / C=CIRCULATOR**

N / SMA Connector options (X)				
Isolator			Circulator	
Port 1	Port 2		Port 3 Male	Port 3 Female
Female	Male	-1	-11	-21
Male	Female	-2	-12	-22
Female	Female	-3	-13	-23
Male	Male	-4	-14	-24

Specifications		Units
Frequency	850-869	MHz
Insertion Loss	0.45	dB
Isolation	65	dB
VSWR	1.20	:1
Temperature Range	-30 to +70	°C
RF Power Forward / Load	150	Watts
RF Power Reverse	200	Watts
RF Power Peak	1500	Watts

## Double Junction, Coaxial Isolator, 850-869MHz, F1, 150 Watts Superior performance at high power

