


Waveguide Isolator, 163.5-168.5 GHz WR5 or WR6, 0.5 Watts (Preliminary)

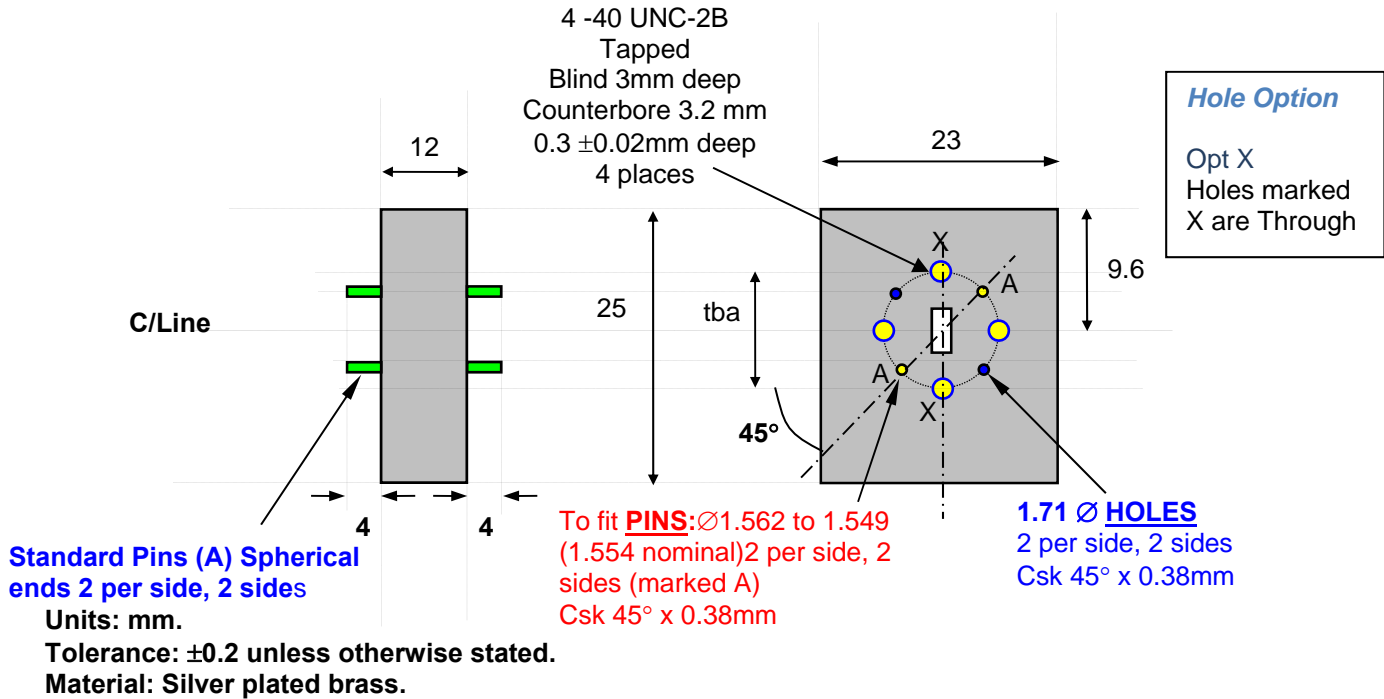

Direction of RF:	
R	Default ▶
L	◀

Order Examples: **RADI-163.5-168.5-WR5-0.5WR**
I=ISOLATOR

Specifications:

Frequency GHz	Insertion loss dB (max)	Isolation dB (min)	VSWR	Reverse Power Watts	Forward Power Watts	Operating Temp °C	Interface
163.5-168.5	1.2	15	1.5:1	0.5	0.5	0 to +50	WR5 or WR6