


Waveguide Isolator, 22-33GHz, 10% Bandwidth, WR34 1Watt Reverse Power

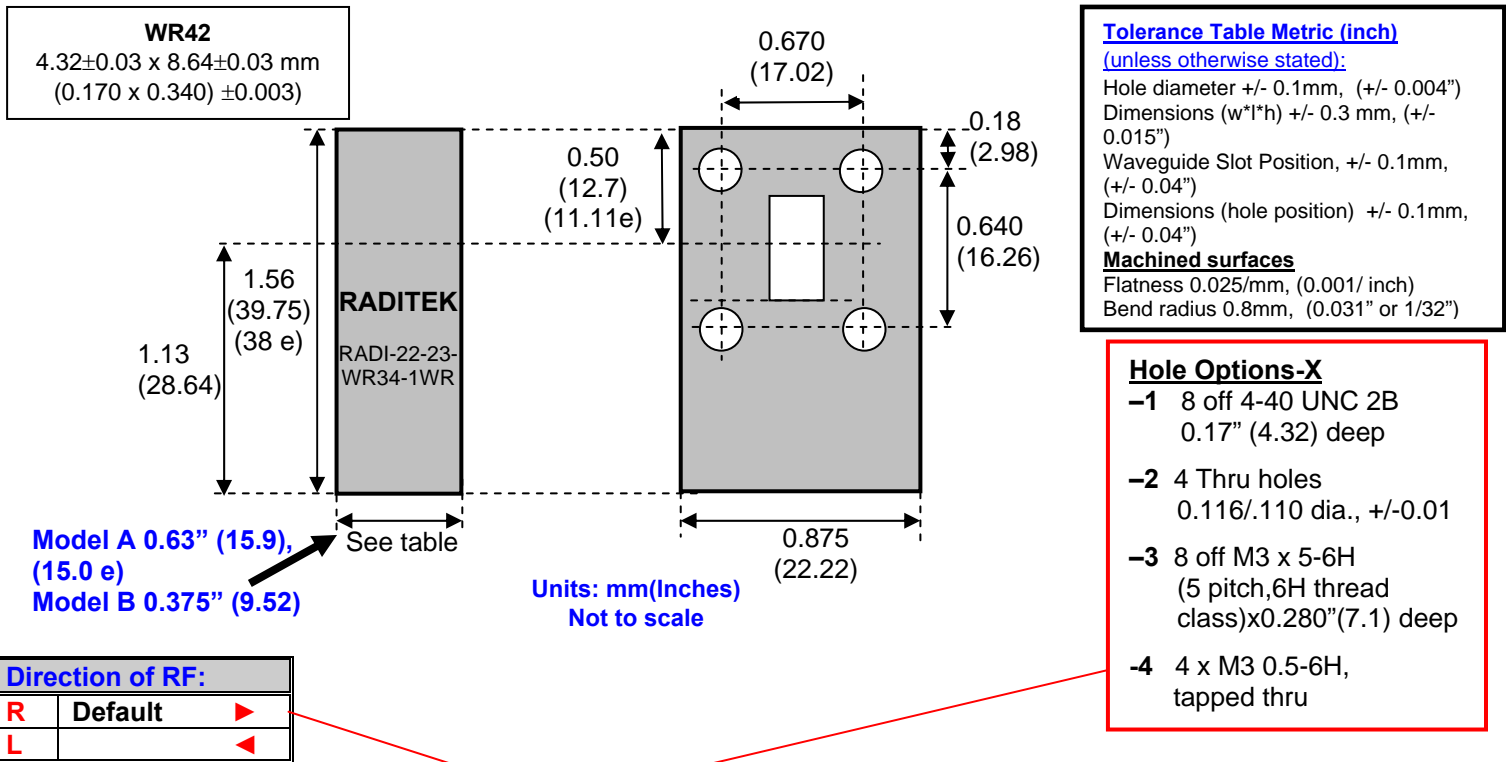

Order Examples: **RADI-25.0-27.0-WR34-1WR-1-b**
I=ISOLATOR

Model A Standard

Specifications	Any 10% Bandwidth	Model A	Model A	Model A	Model A	Units
Frequency Range		22.8-25.2	24.25-26.7	24.25-27.5	25.0-27.0	GHz
Insertion loss	0.25	0.35	0.25	0.3	0.25	dB
Isolation	20	19	20	20	20	dB
VSWR (in and out)	1.25:1	1.3:1	1.25:1	1.25:1	1.25:1	
Forward power handling	10	1	10	10	10	Watts (max.)
Reverse power	1	1	1	1	1	Watts
Operating temperature	-30 to 70	-30 to 65	-40 to 85	-30 to 70	-30 to 70	°C
Flange	UG-1530/U	UG-1530/U	UG-1530/U	UG-1530/U	UG-1530/U	
		e	e			

Waveguide Isolator, 22-33GHz, 10% Bandwidth, WR34 1Watt Reverse Power

Specifications	Model B					Units
Frequency Range	25.5-26.75					GHz
Insertion loss	0.3					dB
Isolation	20					dB
VSWR (in and out)	1.25:1					
Forward power handling	10					Watts (max.)
Reverse power	1					Watts
Operating temperature	-30 to 70					°C
Flange	UG-1530/U					