


## Waveguide Isolator, WR22, 33-50GHz, Full and Part Bands 1Watt Reverse Power

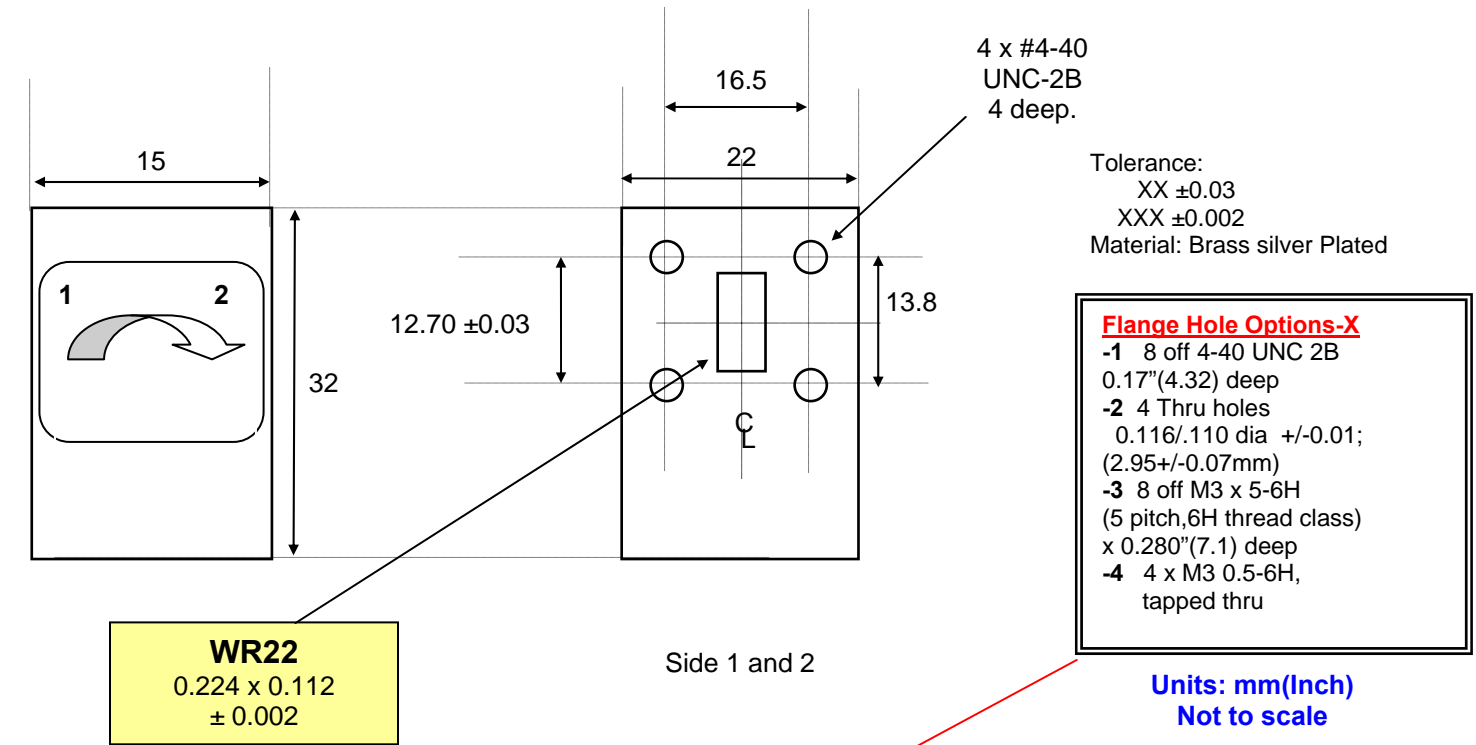

Direction of RF:	
R	Default ▶
L	◀

Order Examples: **RADI-33-50-WR22-1WR-1**  
**I=ISOLATOR**

Specifications	Any 10% bandwidth	Full	Units
Frequency	33-50	33-50	GHz
Insertion loss	0.3	0.5	dB (maximum)
Isolation	23	15.5	dB (minimum)
VSWR	1.25:1	1.4:1	
Rated power Average	1	1	Watt(average)
Operating temperature	-30 to 75	+15 to +35	°C
Altitude	To 15,000	To 15,000	feet
Humidity	To 95	To 95	%RH