


Waveguide Isolator, 50-60GHz [5GHz Bandwidth] WR15 package - UG-385/U flange, 1 Watt

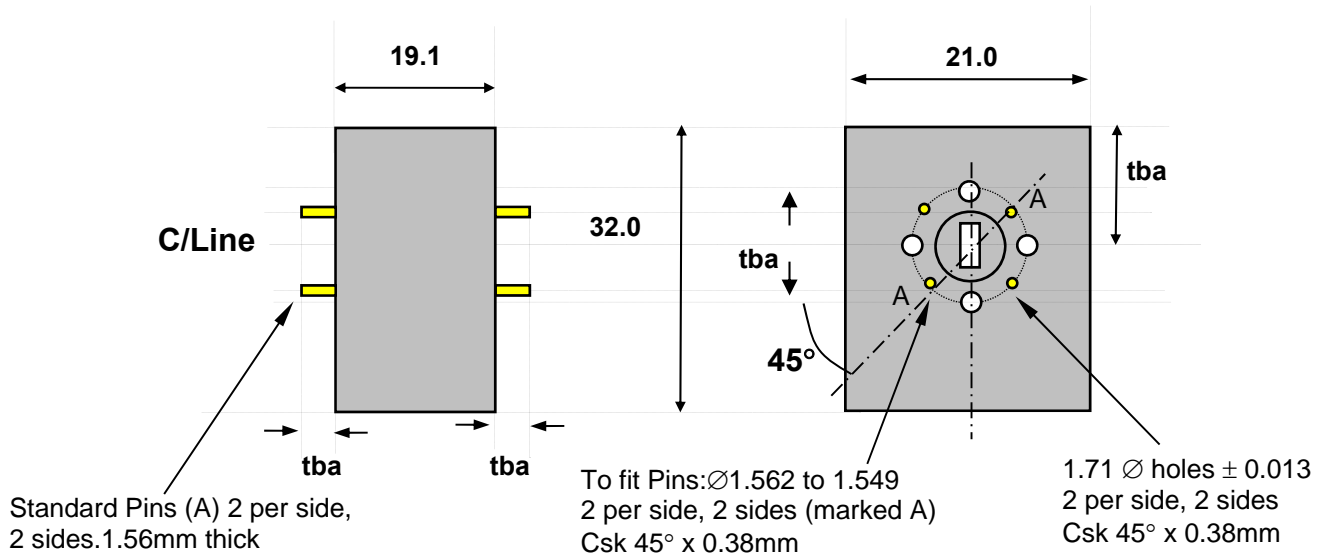

Direction of RF:	
R	Default ▶
L	◀

Units: mm.

Tolerance: ± 0.2 unless otherwise stated.

Material: Silver plated brass.

Order Examples: **RADI-50-60-(5GHz BW)-WR15 UG-385/U-1WR**
I=ISOLATOR

Specifications	Units	
Frequency range	50-60 GHz	
Bandwidth	5 GHz max	
Insertion loss	0.4	0.4 dB (max)
Isolation	20	18 dB (min)
VSWR	1.25:1	1.30:1
Power Reverse	1 Watts	
Operating Temperature	+25	-30 to +70 °C
Waveguide Interface	WR-15, UG385/U	