


## 2-Way Splitter Combiner, 1000-4000MHz, 100 Watts, Drop-In

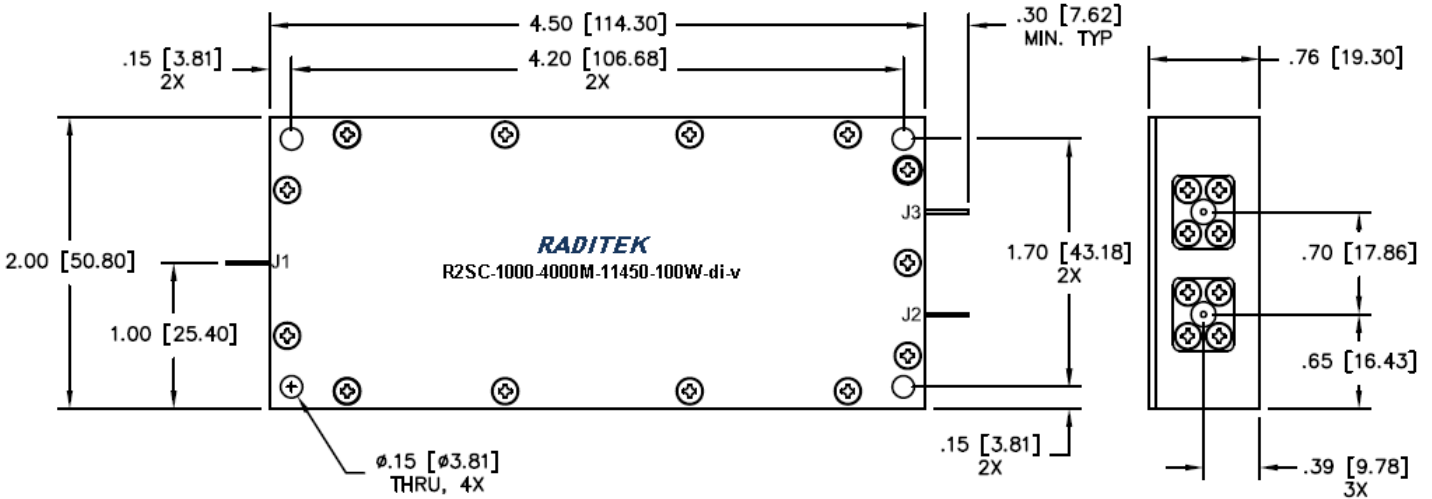

Units: Inch(mm)  
Not to scale

Tolerance: .XX  
.XXX  
ANG.

±0.02 [0.5]  
±0.005 [0.127]  
± 1/2°

Material: AL, Alloy 6061-T651  
Finish: Electro Deposited Nickel, Per QQ-N-290, 0.0003 Min. Semi-Bright

Order Examples: R2SC-1000-4000M-11450-100W-di-v

Description: (2-Way Splitter Combiner, 1000-4000MHz, Size 114.3x50.8mm, 100 Watts, Drop-In)

Specifications	Units	
Frequency	100-4000	MHz
Insertion Loss	<0.6	dB
Isolation	>14	dB
VSWR	<1.3:1	
Phase Balance	±5°	
Amplitude Balance	±0.25	dB
Power	100	Watts
Temperature	-55 to 85	°C
Connectors: J1-J3 PIN Diameter	0.02	In.