


2-Way Splitter Combiner, 20-600MHz, 200 Watts, Drop-In, m1

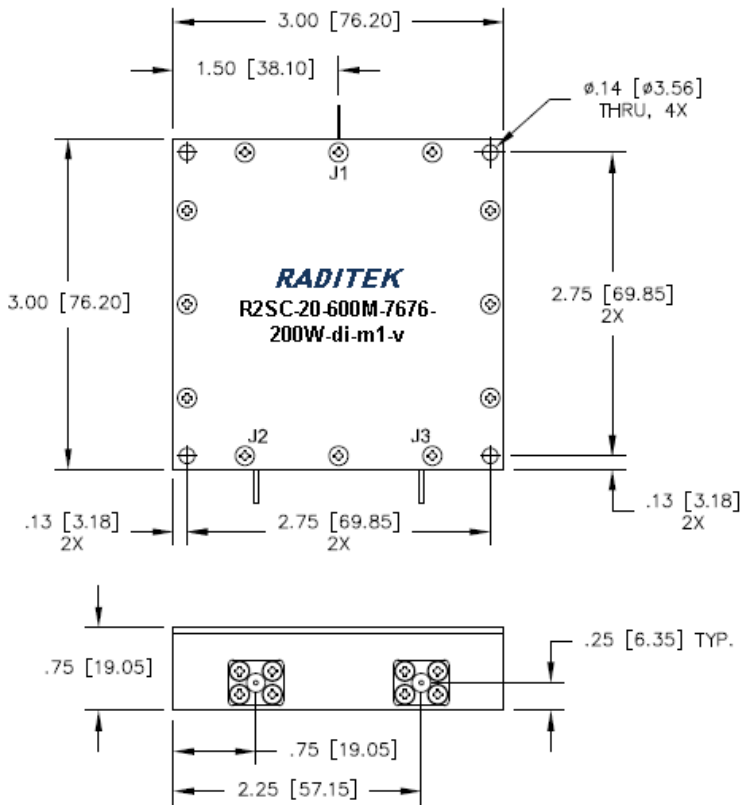

Tolerance: .XX ±0.02
 .XXX ±0.010
 ANG. ± 1/2°

Material: AL, Alloy 6061-T651
Finish: Chem Film, Clear, Per MIL-DTL-5541, Type 2, Rev F, Class 3

Units: Inch(mm)
Not to scale

Order Examples: R2SC-20-600M-7676-200W-di-m1-v

Description: (2-Way Splitter Combiner, 20-600MHz, Size 76.2x76.2mm, 200 Watts, Drop-In)

Specifications		Units
Frequency	20-600	MHz
Insertion Loss	<0.70	dB
Isolation	>16	dB
VSWR	<1.5:1	
Phase Balance	±5°	
Amplitude Balance	±0.2	dB
Power	200	Watts
J1	50	Ω
J2-J3	25	Ω
Connectors: J1 PIN Diameter	0.02	in.
J2-J3 PIN Diameter	0.04	in.