


## 2-Way Splitter Combiner, 500-2500MHz, 200 Watts, Drop-In

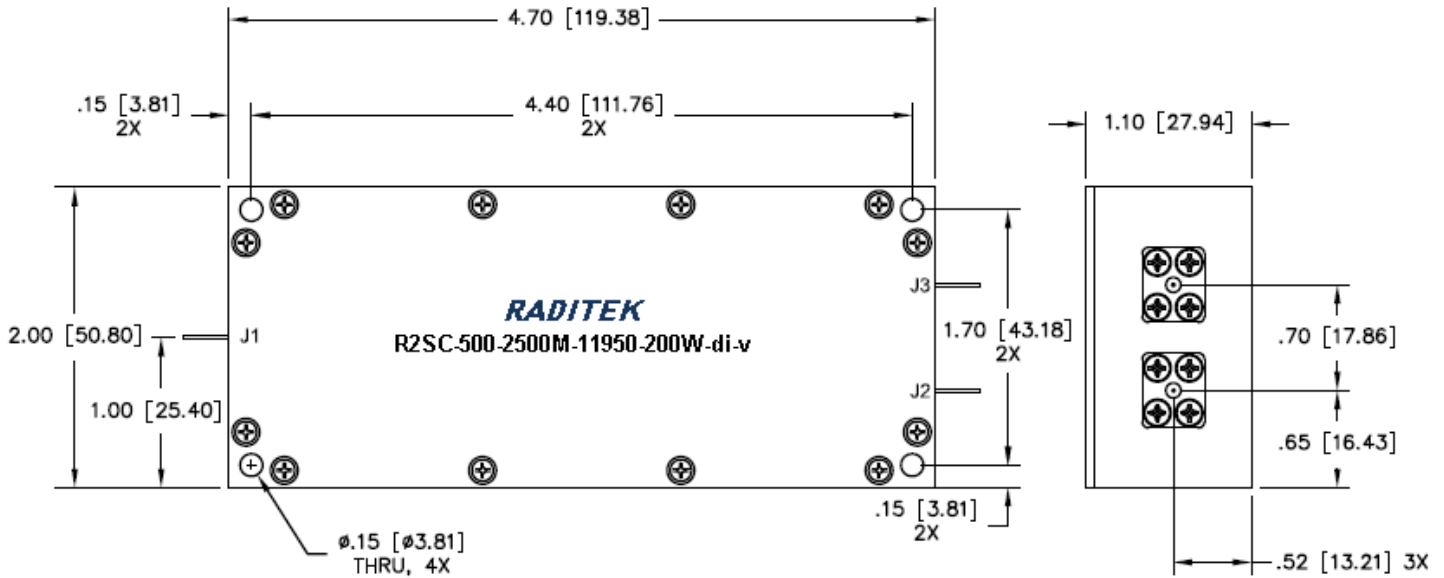

Units: Inch(mm)  
Not to scale

Tolerance: .XX      ±0.02  
              .XXX     ±0.005  
              ANG.     ± 1/2°

**Material:** AL, Alloy 6061-T651  
**Finish:** Electro Deposited Nickel, Per QQ-N-290, 0.0003 Min. Semi-Bright

**Order Examples:** R2SC-500-2500M-11950-200W-di-v  
**Description:** (2-Way Splitter Combiner, 500-2500MHz, Size 119.38x50.80mm, 200 Watts, Drop-In)

Specifications	Units	
Frequency	500-2500	MHz
Insertion Loss	<0.4	dB
Isolation	>15	dB
VSWR	<1.3:1	
Phase Balance	±5°	
Amplitude Balance	±0.2	dB
Power	200	Watts
Temperature	-55 to 85	°C
Connectors: J1-J3 PIN Diameter	0.02	In.