


3-Way Splitter Combiner, 2.0-2.4GHz, D-Package, 35 Watts, Surface Mount

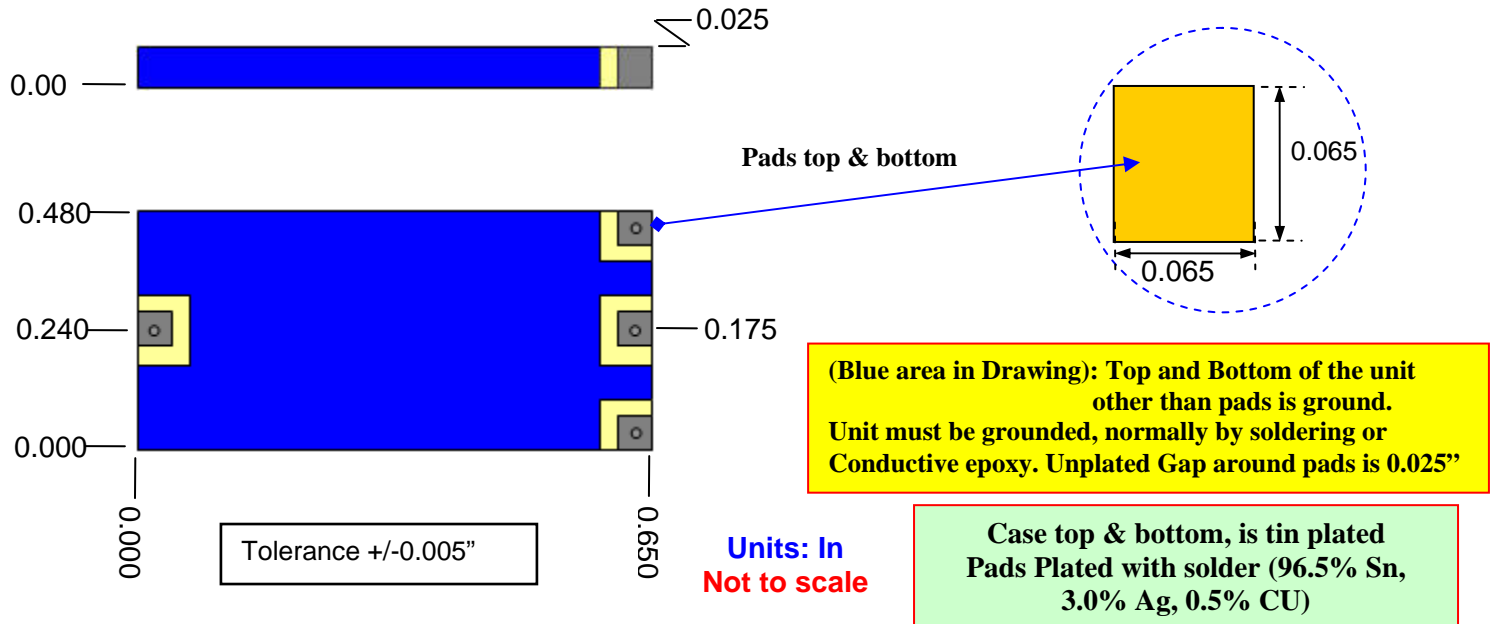

Order Examples: R3SC-2.0-2.4-D-35W-S-r4

Description: (3-Way Splitter Combiner, 2.0-2.4GHz, D-Package, 35 Watts, Surface Mount)

The R3SC-2.0-2.4-D-35W-S-r4 defines one of the unique RADITEK surface mount 3 way, 0° power splitter/combiner for PCS, 2.5G, and 3G UMTS applications
Where F1=lower freq. in GHz, F2=high freq. in GHz,

Specifications		Units
Frequency	2.0-2.4	MHz
Insertion loss	(4.77) + 0.3	dB (Theoretical) + device
Output port isolation	16	dB
VSWR	1.40	:1
Amplitude Balance	<± 0.25	dB max.
Phase balance	±4°	Max.
Power handling	35	Watts
Operating temperature	-55to +80	°C

3-Way Splitter Combiner, 2.0-2.4GHz, D-Package, 35 Watts, Surface Mount

