


# RADITEK INC.

---

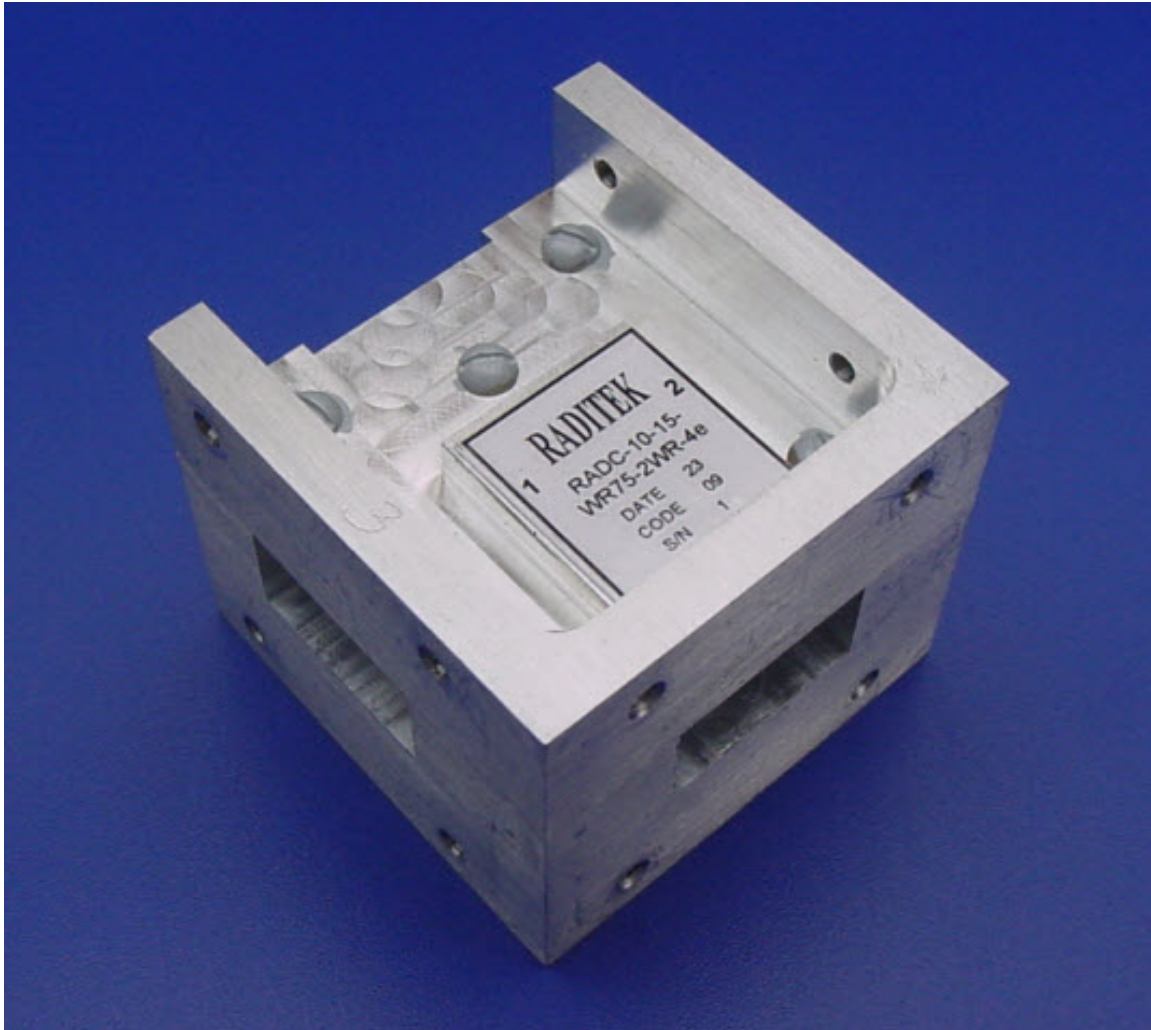

Our newest Waveguide Circulator, the RADC-10-15-WR75-2WR-4e, is a 10.0-15.0GHz waveguide circulator with WR75 flanges and 2 Watts or 600 Watts of power handling with dimensions of 44.5 X 44.5 X 44.5 millimeters. This series can actually handle any frequency from 10-15GHz with 10% operational bandwidth standard, with wider bandwidth versions available upon request. Operating over the full temperature range of  $-30$  to  $+70^{\circ}\text{C}$ , specifications are insertion loss 0.2dB, isolation 20dB, and VSWR 1.22:1 maximum.

**RADITEK** specializes in Design, Development, and Manufacturing of "High Volume/Low Cost" Wireless and Microwave products. Please see our website at <http://www.raditek.com/> or email us at [Sales@Raditek.com](mailto:Sales@Raditek.com) with any questions you may have.