


RADITEK INC.

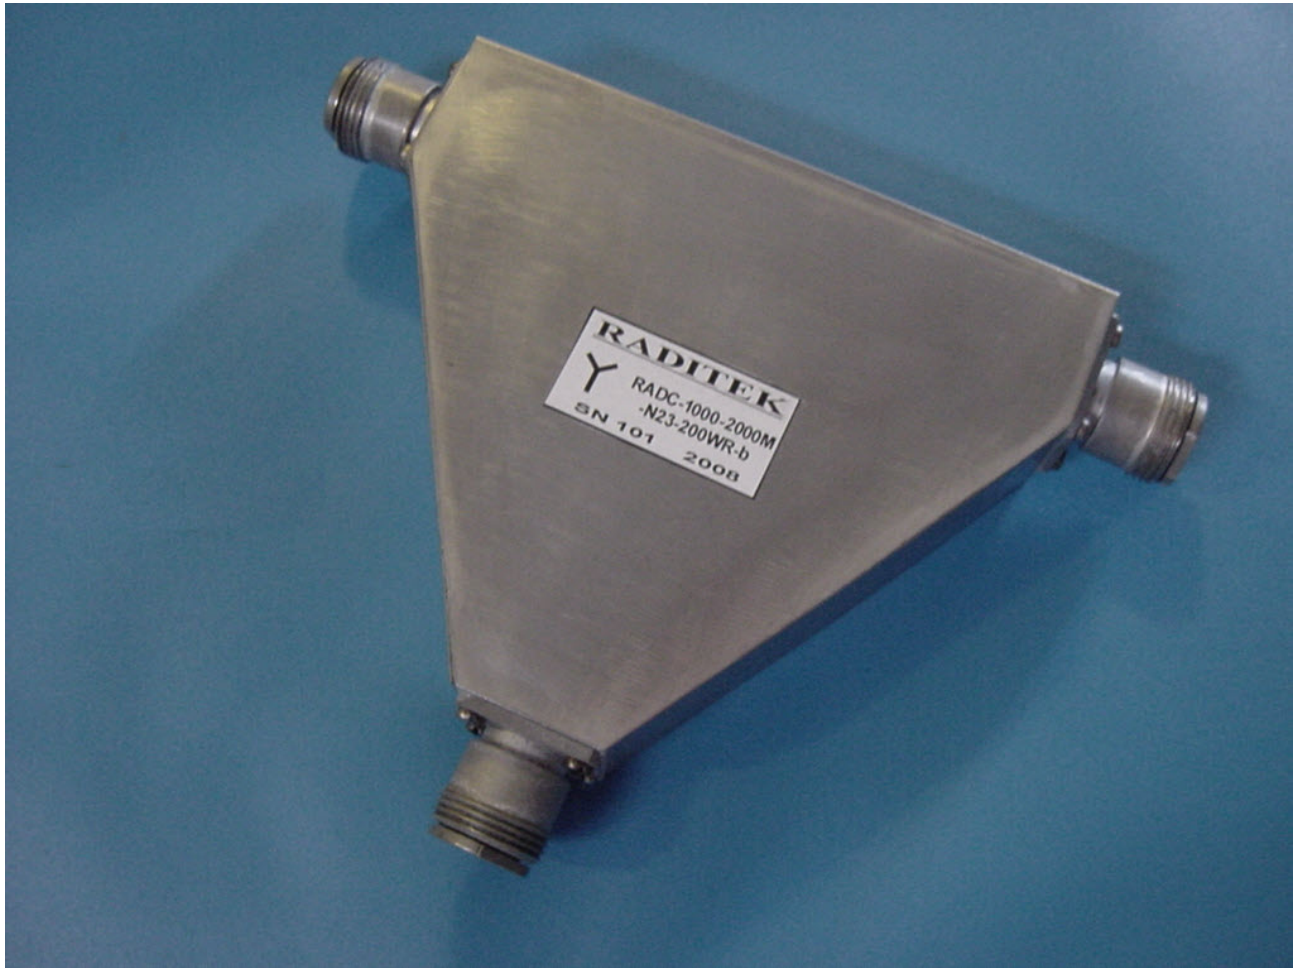

Octave Band 1000-2000MHz Circulator

This Circulator is a cost effective solution for wide band frequency applications. This model covers 1000-2000 MHz standard with 25 Watts of reverse power and 75 Watts of Forward Power. Reverse Power Options available are: 1, 5, 10, 20, 25Watts Max): Other Popular frequencies, 950-1750MHz, 1100-1600MHz, 1200-2200MHz, 1400-2700MHz and 1500-3000MHz. Various 500MHz bandwidth units also available. Typical Specifications: 0.4dB Insertion Loss, 20dB Isolation, VSWR 1.20:1. Operating Temp. 55°C Max. Dimensions: 78.4 (W) x 77.0 (L) x 21.2 (H) mm. These units are proven in the field and are fully ROHS compliant.

RADITEK specializes in Design, Development, Manufacturing of "High Volume/Low Cost" Wireless and Microwave products. Please see our website at <http://www.Raditek.com/> or email us at Sales@Raditek.com with any questions you may have.

WORLD HQ: 1702L Meridian Ave. Suite 127, San Jose, Ca 95125, U.S.A.

Telephone: (408) 266-7404 FAX: (408) 266-4483

WEB: www.raditek.com, E-mail: sales@raditek.com