


## RADC-80-81M-716(23)-2.2KWL-2.2KWFwd-b

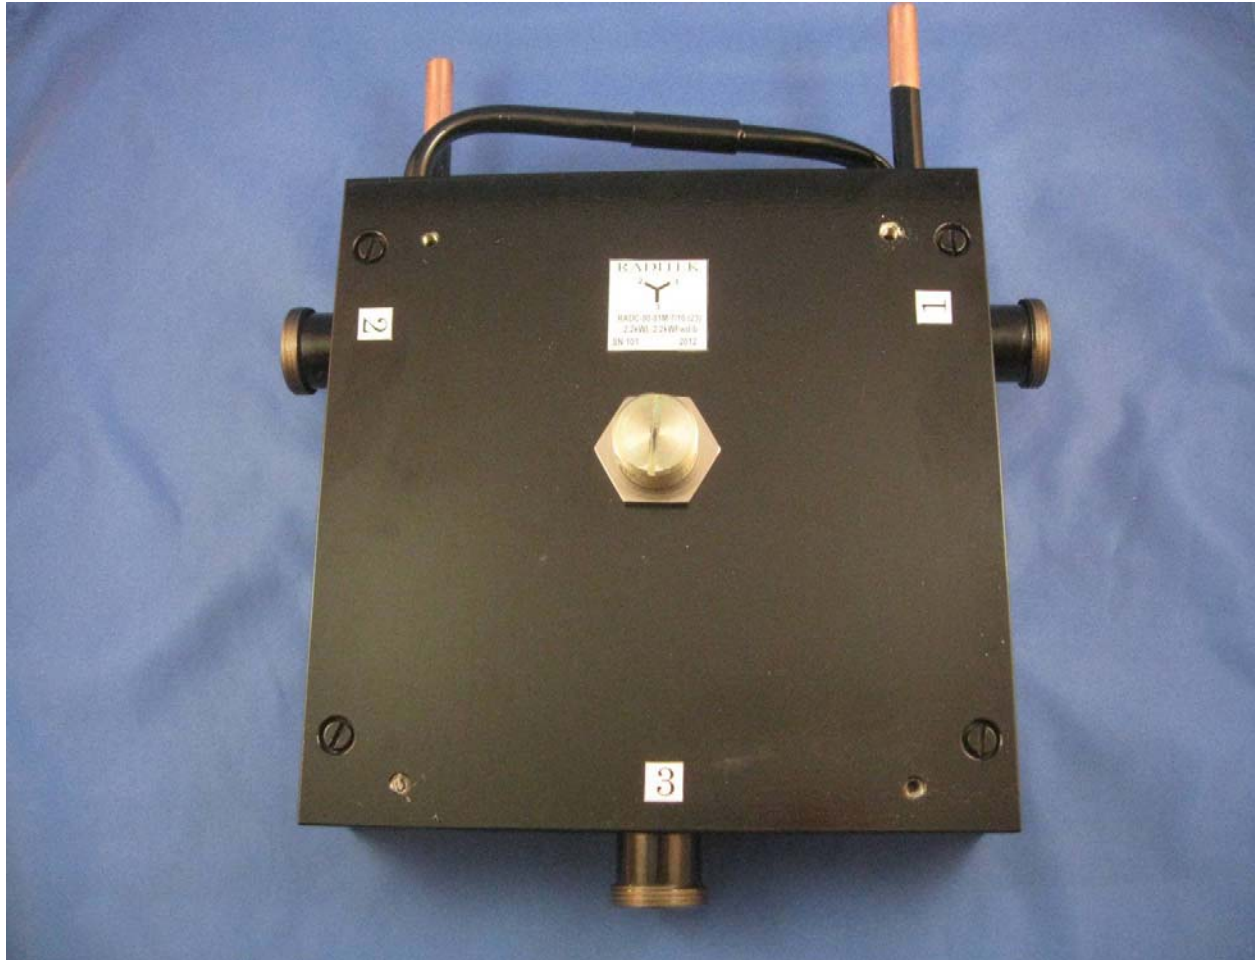

**RADITEK's** new 2.2 kilowatt High Power Coaxial Circulator operating from 80-81MHz, Features low loss and high power handling with water cooling. Typical Specifications: 0.4dB Insertion Loss, 20dB Isolation, VSWR 1.25:1. Operating at 0 to +40°C Temperature, Humidity is Up to 95% Operating @ +40 °C. Connectors are 7/16 Female. Water Cooling @ 29-35°C and 2 Liters per minute with 100psi water pressure average. Dimensions: 200.0 (W) x 200.0 (L) x 52.4 (H) mm

These units are proven in the field and are fully ROHS compliant..

**RADITEK** specializes in RF Design and Development of "High Volume / Low Cost" Microwave, Wireless and Telecom Broadband Components, Assemblies and Systems. Please see our website at [www.Raditek.com](http://www.Raditek.com) or email us at [Sales@Raditek.com](mailto:Sales@Raditek.com) with any questions you may have.