


## Octave Band Circulators RADC-800-2000M-S23-10-100WR-b

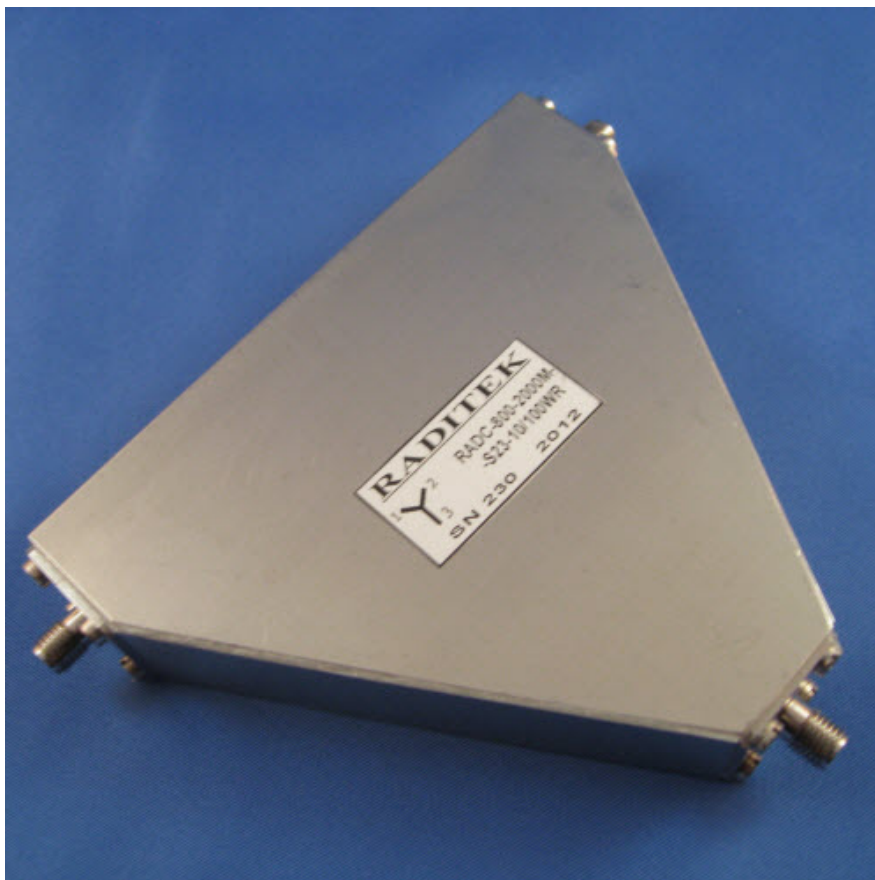

**RADITEK's** Octave Band Circulators are a cost effective solution for wide band frequency applications. This model covers 800-2000 MHz with 10 Watts of reverse power and 100 Watts of Forward Power. Reverse Power Options available are: 1, 5, 10, 20, 25Watts Max. Other Popular frequencies, 500-1000MHz, 1500-3000MHz, 1.0-2.0GHz, 2.0-4.0GHz, 3.0-6.0GHz, 4.0-8.0GHz, 6-12GHz and 8.0-18GHz. Octave Plus and Peripheral Mode units also available. Typical Specifications: 1.2dB Insertion Loss, 10dB Isolation, VSWR 1.7:1. Operating Temp. 55°C Max. Dimensions: 96.2 (W) x 83.6 (L) x 21.6 (H) mm. These units are proven in the field and are fully ROHS compliant.

**RADITEK** specializes in RF Design and Development of "High Volume / Low Cost" Microwave, Wireless and Telecom Broadband Components, Assemblies and Systems. Please see our website at <http://www.Raditek.com> or email us at [Sales@Raditek.com](mailto:Sales@Raditek.com) with any questions you may have.