


RADITEK INC.

KU Band, WR62 Waveguide Isolator

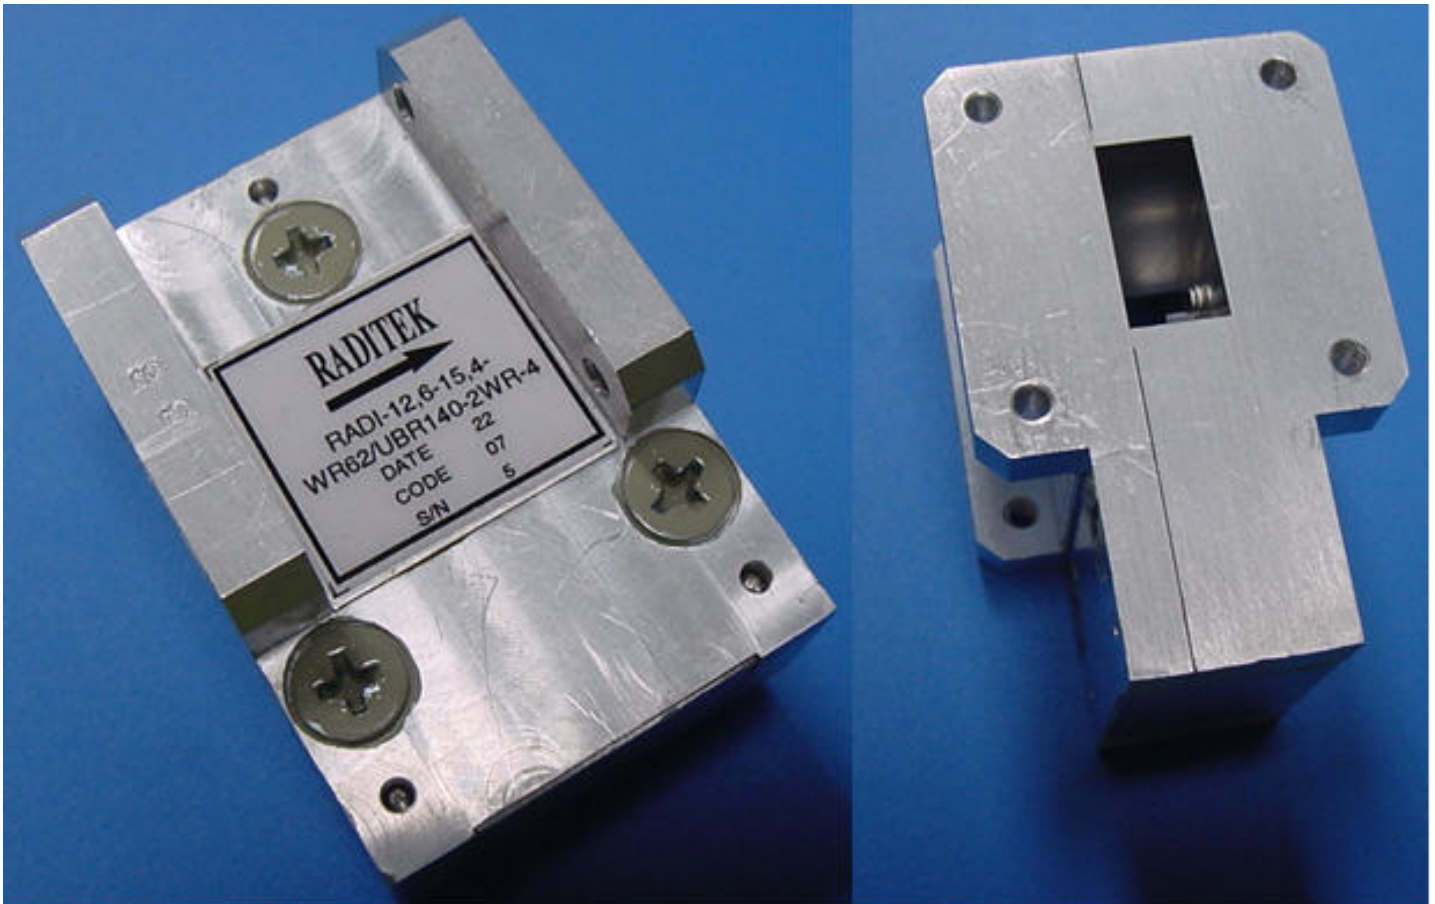

RADITEK specializes in Design, Development, and Manufacturing of "High Volume/Low Cost" Wireless and Microwave products. Our newest model, the RADI-12.6-15.4-WR62-UBR140-2WR-4, is a 12.6-15.4GHz waveguide Isolator with WR62-UBR140 flanges and 2 watts of power handling forward and reverse with dimensions of 35.0 x 50.0 X 33.26 mm. This series can actually handle any frequency from 12.5-15.5GHz with 10% operational bandwidth standard, wider bandwidth versions available upon request. Operating over the full temperature range of -30 to +65°C, specifications are insertion loss 0.2dB, isolation 20dB, and VSWR 1.22:1 maximum.

Please see our website at <http://www.raditek.com/> or email us at Sales@Raditek.com with any questions you may have.

WORLD HQ: 1702L Meridian Ave. Suite 127, San Jose, Ca 95125, U.S.A.

Telephone: (408) 266-7404 FAX: (408) 266-4483

WEB: www.raditek.com, E-mail: sales@raditek.com