


## RADI-32.5-37.5-WR28-4WR-e

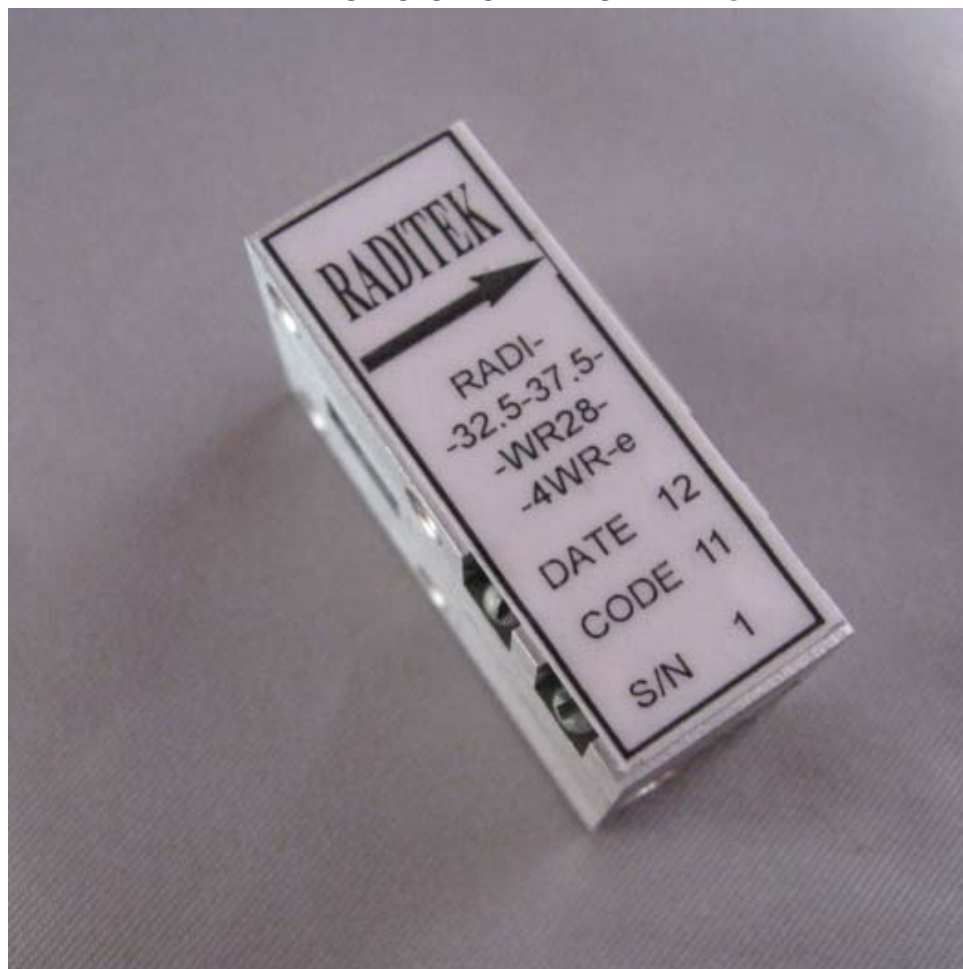

***RADITEK's* K Band, WR28 Waveguide Isolator** Our Waveguide Isolators operate up to frequencies beyond 100 GHz. The standard units are typically clear or yellow-alloyed Aluminum. The ultra, low loss units are silver brass construction; virtually any Waveguide type can be supplied. Either metric, US threads or through holes can be supplied

These units are proven in the field and are fully ROHS compliant.

***RADITEK* specializes in RF Design and Development of "High Volume / Low Cost" Microwave, Wireless and Telecom Broadband Components, Assemblies and Systems.** Please see our website at <http://www.Raditek.com> or email us at [Sales@Raditek.com](mailto:Sales@Raditek.com) with any questions you may have.