


RADI-89.5-94.5-WR10-0.5WR-b

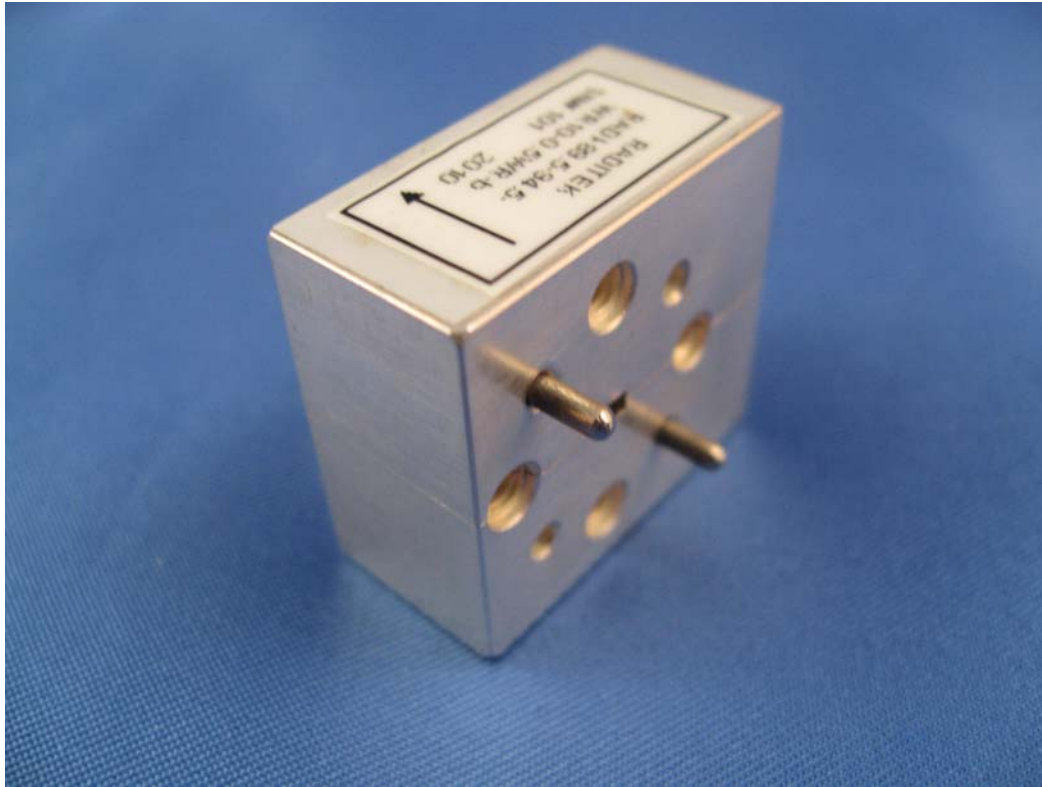

RADITEK's 89.5-94.5GHz, WR10 Waveguide Isolator used in scientific research and intra campus high data rate communications. The standard units are ultra low loss with a silver plated brass construction. Specifications: <0.5 dB Insertion Loss, >18dB Isolation, <1.70:1 VSWR Dimensions (mm): 12(W) x 25(H) 22(T).

Raditek can supply virtually any Waveguide isolator and circulator type. Either metric, US threads or through holes can be supplied

These units are proven in the field and are fully ROHS compliant.

RADITEK specializes in RF Design and Development of "High Volume / Low Cost" Microwave, Wireless and Telecom Broadband Components, Assemblies and Systems. Please see our website at www.Raditek.com or email us at Sales@Raditek.com with any questions you may have.