RADITEK INC.

C-Band, Low Noise Block Down Converter

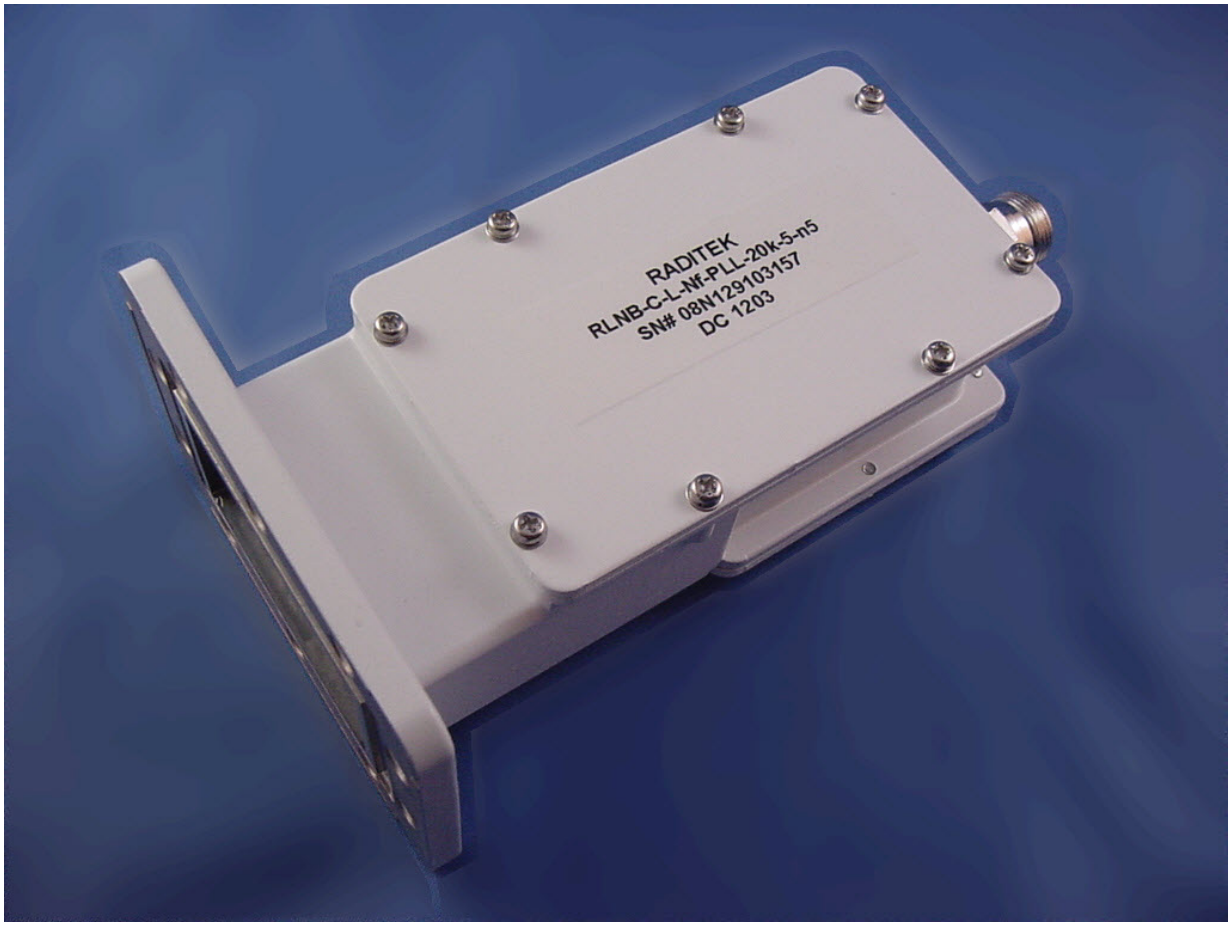

RADITEK's **High Stability C-Band PLL LNB is our latest addition to our SATCOM products. Input frequency 3.4 to 4.2 GHz, L.O. frequency 5.15 GHz, Output frequency 950 to 1750 MHz. Typical Specifications include, Noise temperature 20K to 30K, L.O. stability ±2 kHz to ±25 kHz over temperature, excellent offset. Phase noise -73 dBc/Hz at 1kHz, Input / Output VSWR 2.2 : 1. Temperature Range -40°C to +60°C**

RADITEK **specializes in RF Design and Development of "High Volume / Low Cost" Microwave, Wireless and Telecom Broadband Components, Assemblies and Systems. Please see our website at www.Raditek.com or email us at Sales@Raditek.com with any questions you may have.**

WORLD HQ: 1702L Meridian Ave. Suite 127, San Jose, Ca 95125, U.S.A.
Tel: (408) 266-7404 FAX: (408) 266-4483
WEB: www.raditek.com E-mail: sales@raditek.com