
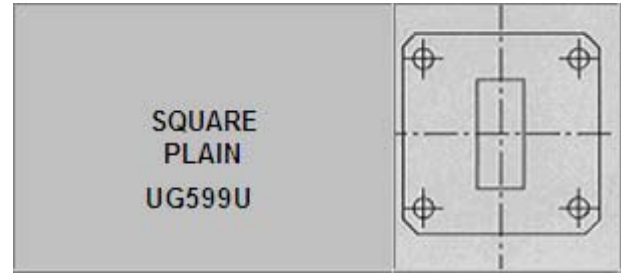


Waveguide Manually Variable Precision Attenuator, 26.5-40.0 GHz, WR28 Package, 0-40dB Attenuation, 0.2 Watts

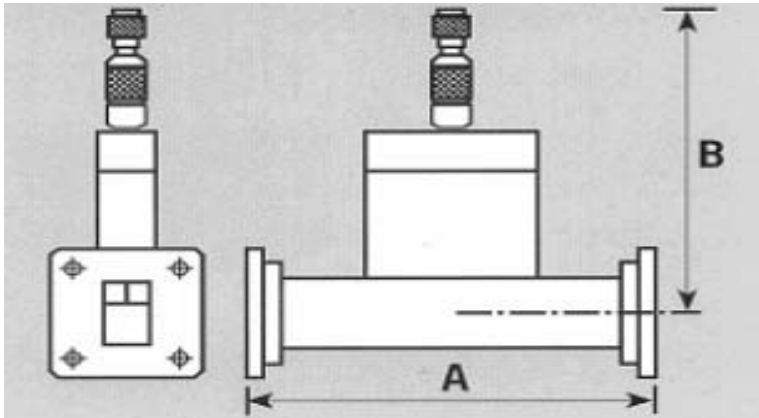

Length "A"	Dim "B"
51	90

Units: mm
Not to scale

Order Examples: RWVATTN-26.5-40.0-WR28-0-40dB-0.2W-e5

Description: (Waveguide Variable Attenuator, 26.5-40.0 GHz, WR28 Package, 0-40dB Attenuation, 0.2 Watts)

Specifications		Units
Frequency range:	26.5-40.0	GHz
VSWR	1.25:1	
Insertion Loss	0.20	dB (max)
Resetting Accuracy	±0.01	dB
Micrometer resolution	0.07	dBs/ div average
Power C	0.2	Watt CW
Waveguide Package	WR28	
Material	Brass	
Finish	Blue paint, Silver Plated flange	
Attenuation Elements	Resistive card	
Calibration	Calibration accuracy	
3 Frequencies in band	0-10 dB ±0.07dB	
1 dB Steps to 10 dB	10-20 dB ±0.1dB	
2 dB Steps to 20 dB	20-30 dB ±0.2dB	
5 dB Steps to 40 dB	30-40 dB ±0.25dB	