


RADITEK INC.

Ceramic Band Pass Filter 1080-1240MHz, Model 1314, 3 Watts, Surface Mount RBPf-1080-1240M-1314-3W-S

code-k

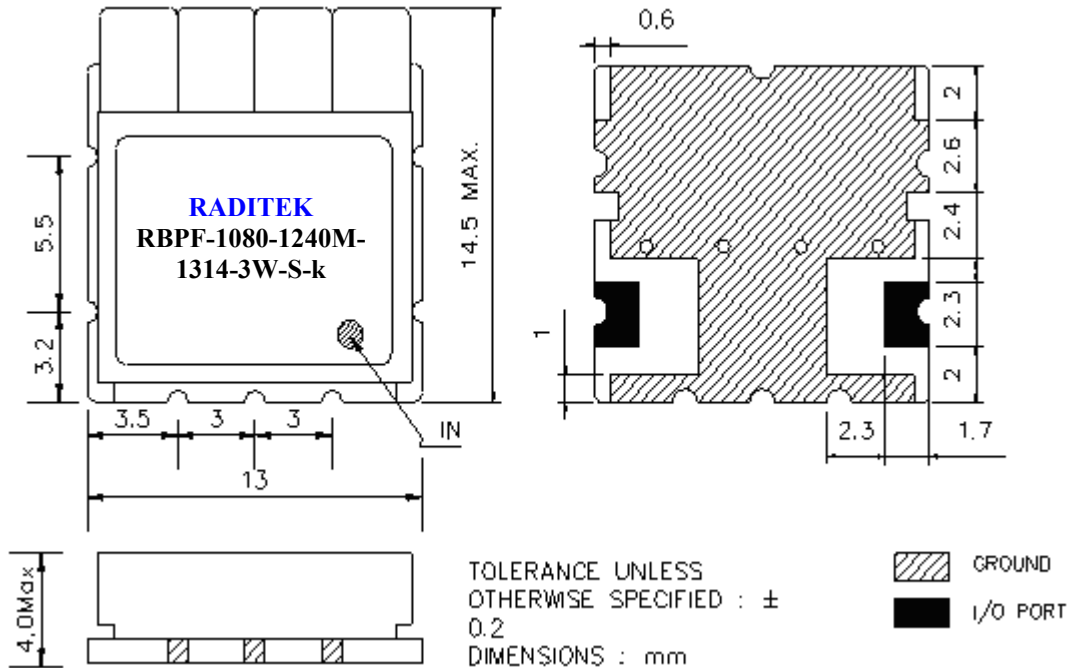

Specifications		Units
Center Frequency	1160	MHz
Bandwidth (BW)	160	MHz
Insertion Loss	Fc=1.8	dB max
VSWR in BW	1.44:1	
Ripple	1.0	dB max
Attenuation	50dB @ 800MHz 20dB @ 1600MHz	
In/Out Impedance	50	Ω
In/Out Power	3	Watts max

RBPf-1080-1240M-1314-3W-S-k

Specifications may be subject to change

05/17/08

WORLD HQ: 1702L Meridian Ave. Suite 127, San Jose, Ca 95125, U.S.A.

Telephone: (408) 266-7404 FAX: (408) 266-4483

WEB: www.raditek.com, E-mail: sales@raditek.com