


RADITEK INC.

Ceramic Band Pass Filter 1120-1240MHz, Model 1312, 3 Watts, Surface Mount RBPF-1120-1240M-1312-3W-S

code-k

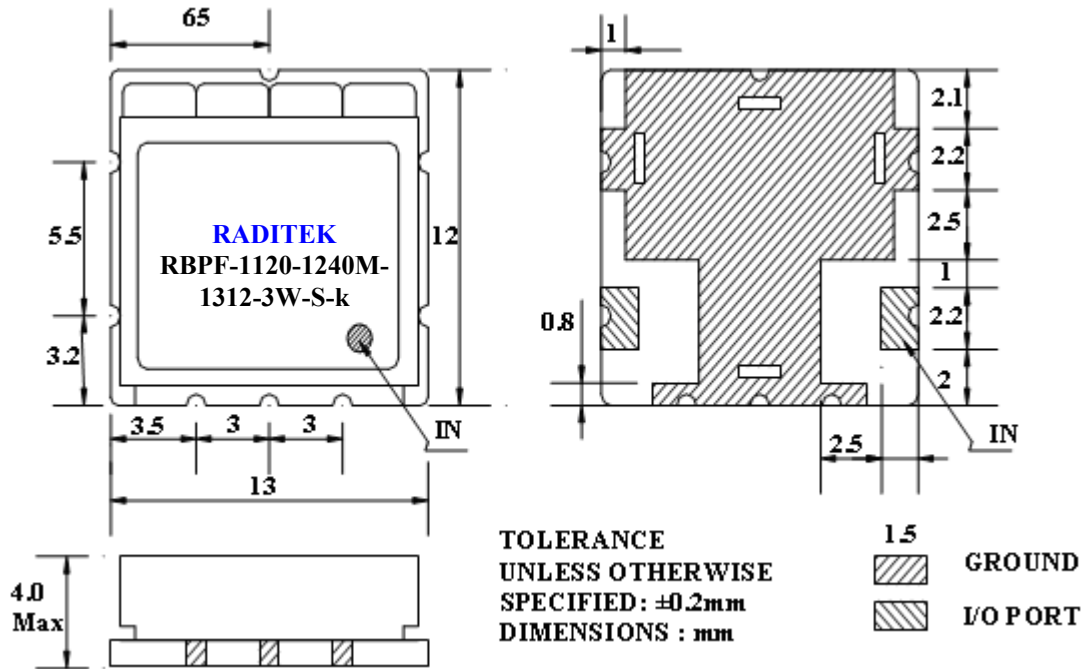

Specifications		Units
Center Frequency	1180	MHz
Bandwidth (BW)	120	MHz
Insertion Loss	$F_c=1.8$	dB max
VSWR in BW	1.44:1	
Ripple in BW	1.0	dB max
Attenuation	50dB min @ 800 ~ 900MHz 30dB min @ 1000MHz 20dB min @ 1600MHz	
In/Out Impedance	50	Ω
In/Out Power	3	Watts max

RBPF-1120-1240M-1312-3W-S-k **Specifications may be subject to change**

05/17/08

WORLD HQ: 1702L Meridian Ave. Suite 127, San Jose, Ca 95125, U.S.A.

Telephone: (408) 266-7404 FAX: (408) 266-4483

WEB: www.raditek.com, E-mail: sales@raditek.com