


RADITEK INC.

Ceramic Band Pass Filter 1240-1260MHz, Model 1312, 3 Watts, Surface Mount RBPF-1240-1260M-1312-3W-S

code-k

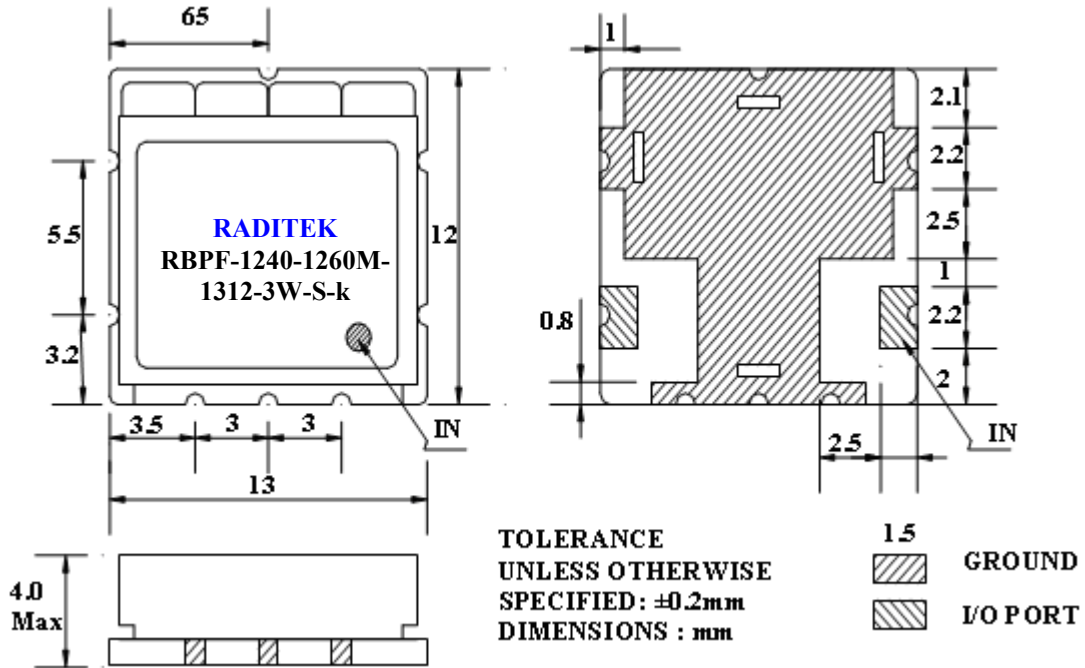

Specifications			Units
Center Frequency	1250		MHz
Bandwidth (BW)	20		MHz
Insertion Loss	2.5 Typ.	3.0 Spcl.	dB max
VSWR in BW	1.38:1 Typ.	1.44:1 Spcl.	
Ripple in BW	0.8 Typ.	1.0 Spcl.	dB max
Attenuation (Absolute Value)	40dB min @ Fo-70MHz 30dB min @ Fo+70MHz		
In/Out Impedance	50		Ω
In/Out Power	3		Watts max

RBPF-1240-1260M-1312-3W-S-k **Specifications may be subject to change**

05/17/08

WORLD HQ: 1702L Meridian Ave. Suite 127, San Jose, Ca 95125, U.S.A.

Telephone: (408) 266-7404 FAX: (408) 266-4483

WEB: www.raditek.com, E-mail: sales@raditek.com