


RADITEK INC.

Ceramic Band Pass Filter

code-k

1985-2010MHz, Model 3511, 3 Watts, Surface Mount
RBPF-1985-2010M-3511-3W-REJ 6.6-S

DIMENSIONS

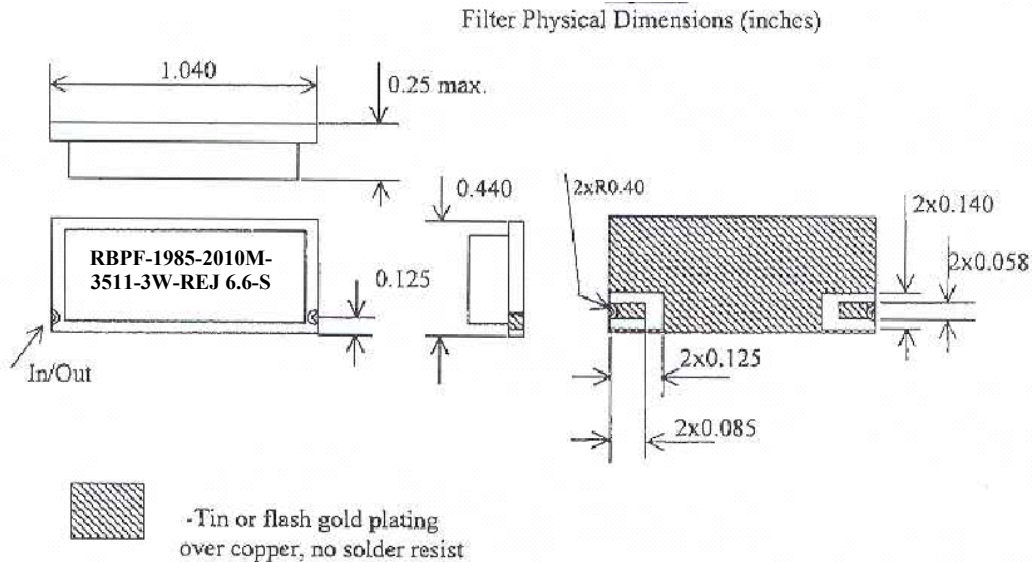


Specifications			Units
Center Frequency	1997.5		MHz
Bandwidth (BW)	25		MHz
Insertion Loss	Fo=4.3 Typ.	Fo=4.5 Spcl.	dB max
VSWR in BW	1.44:1 Typ.	1.50:1 Spcl.	
Ripple in BW	0.8 Typ.	1.0 Spcl.	dB max
Attenuation (Absolute Value)	6.6dB @ Fo±15MHz 70dB @ Fo±230MHz		
In/Out Impedance	50		Ω
In/Out Power	3		Watts max

RADITEK INC.

Ceramic Band Pass Filter 1985-2010MHz, Model 3511, 3 Watts, Surface Mount RBPF-1985-2010M-3511-3W-REJ 6.6-S

code-k

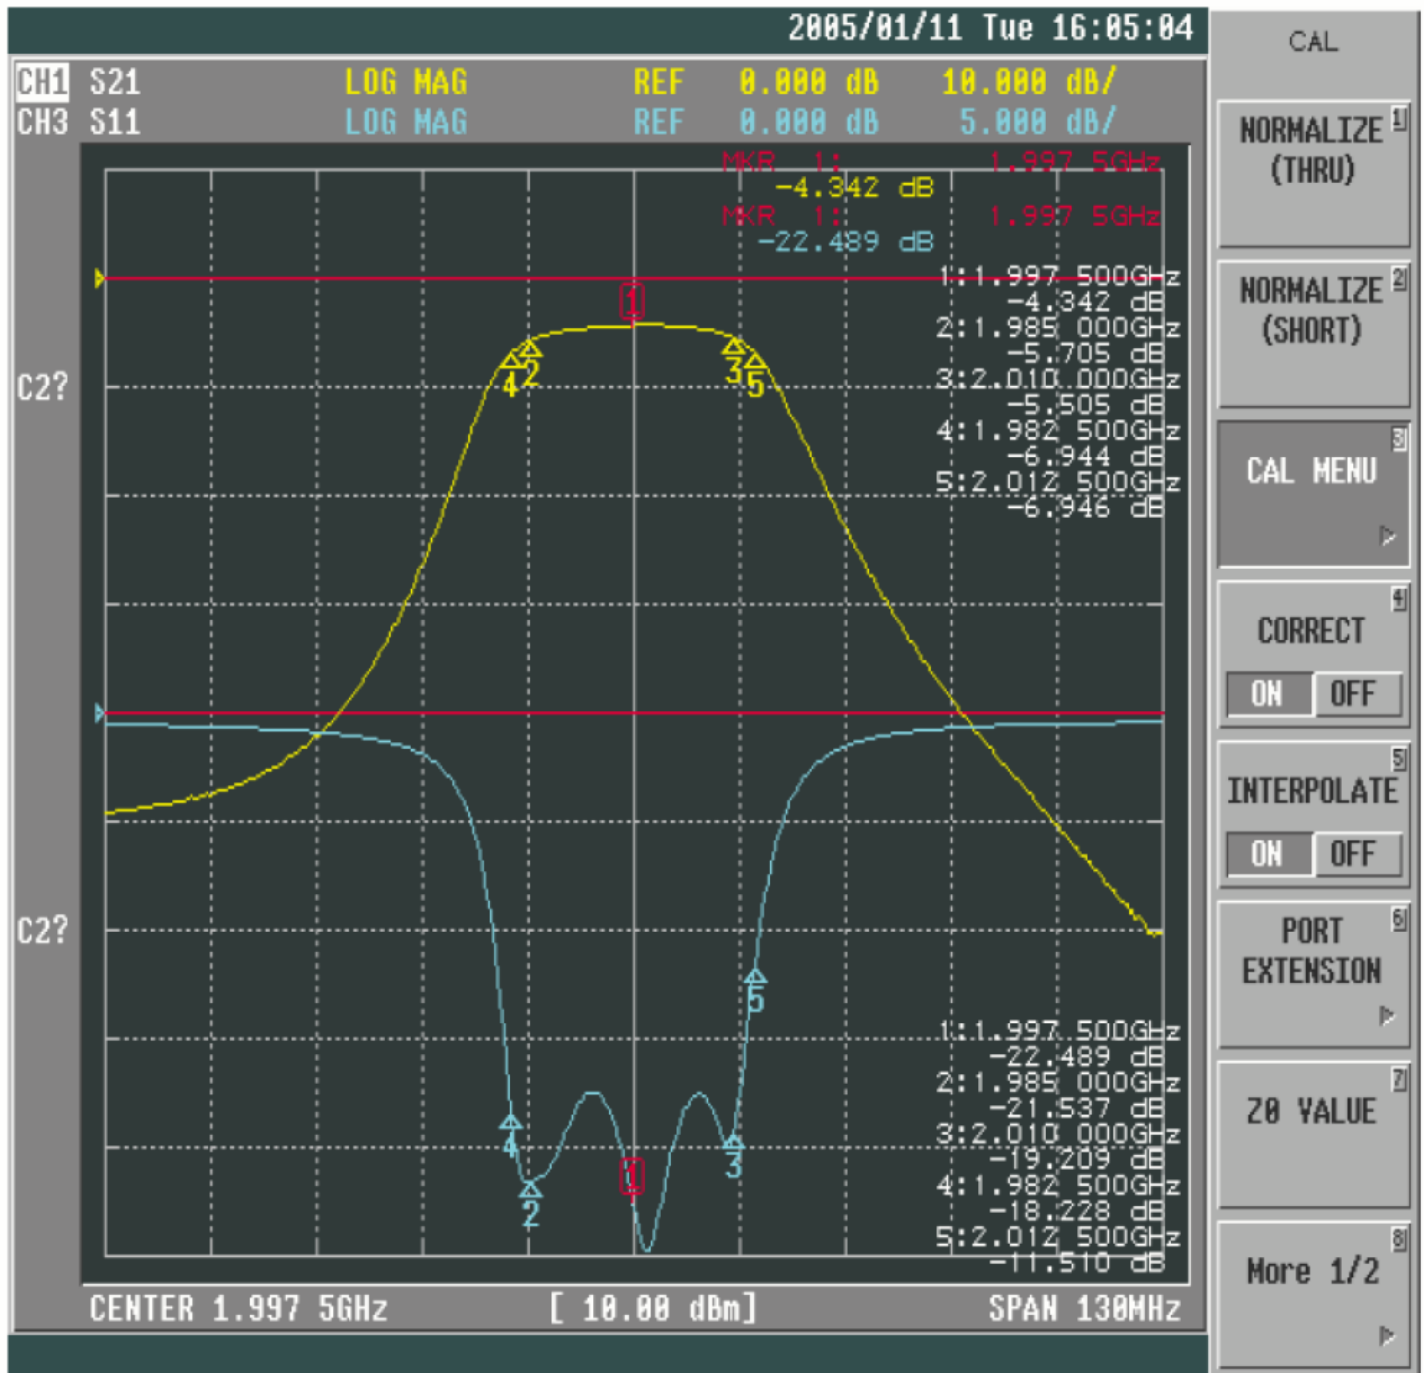

RBPF-1985-2010M-3511-3W-REJ 6.6-S-k Specifications may be subject to change

05/19/08

WORLD HQ: 1702L Meridian Ave. Suite 127, San Jose, Ca 95125, U.S.A.

Telephone: (408) 266-7404 FAX: (408) 266-4483

WEB: www.raditek.com, E-mail: sales@raditek.com