


RADITEK INC.

Ceramic Band Pass Filter

code-k

1985 MHz to 2115 MHz, Model 0806, 5 Watts, Surface Mount
RBPF-1985-2115M-0806-5W-S

DIMENSIONS

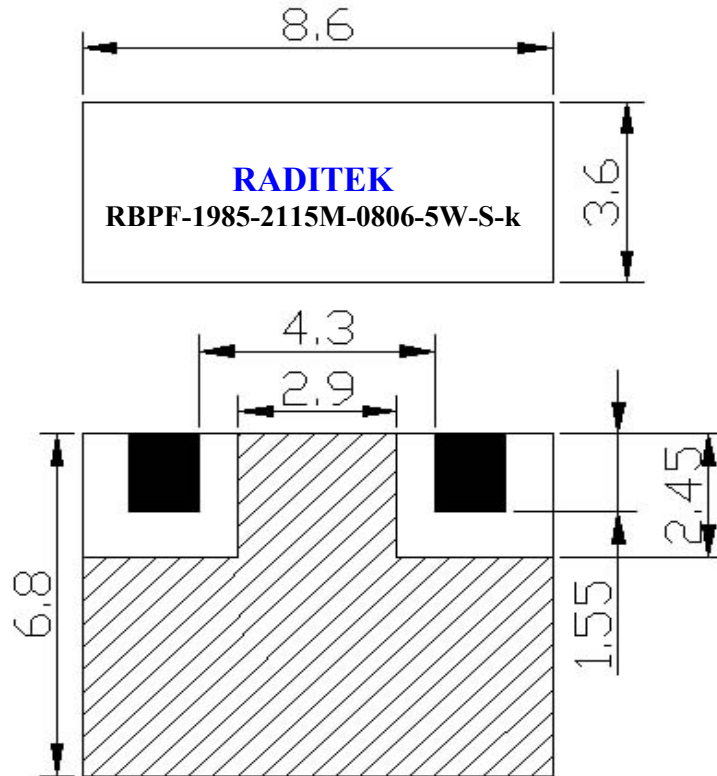

Specifications		Units
Center Frequency	2000	MHz
Bandwidth (BW)	Fo± 15 (1985-2115)	MHz
Insertion Loss	1.5	dB max Typ/Spec
Ripple in BW	0.5	dB max Typ/Spec
Return Loss in BW	15	dB min Typ/Spec
Attenuation	25.0dB min at 1300~1650 35.0dB min at 2350~2750	MHz MHz
Input Power	5	Watt
In/Out Impedance	50	Ω
Operating Temp.	-40 to +85°	Deg C

RBPF-1985-2115M-0806-5W-S-k

Specifications may be subject to change

05/19/08

WORLD HQ: 1702L Meridian Ave. Suite 127, San Jose, Ca 95125, U.S.A.

Telephone: (408) 266-7404 FAX: (408) 266-4483

WEB: www.raditek.com, E-mail: sales@raditek.com