


Cavity Band Pass Filter, 13.75-14.50 GHz SMA Female Connectors, 10 Watts

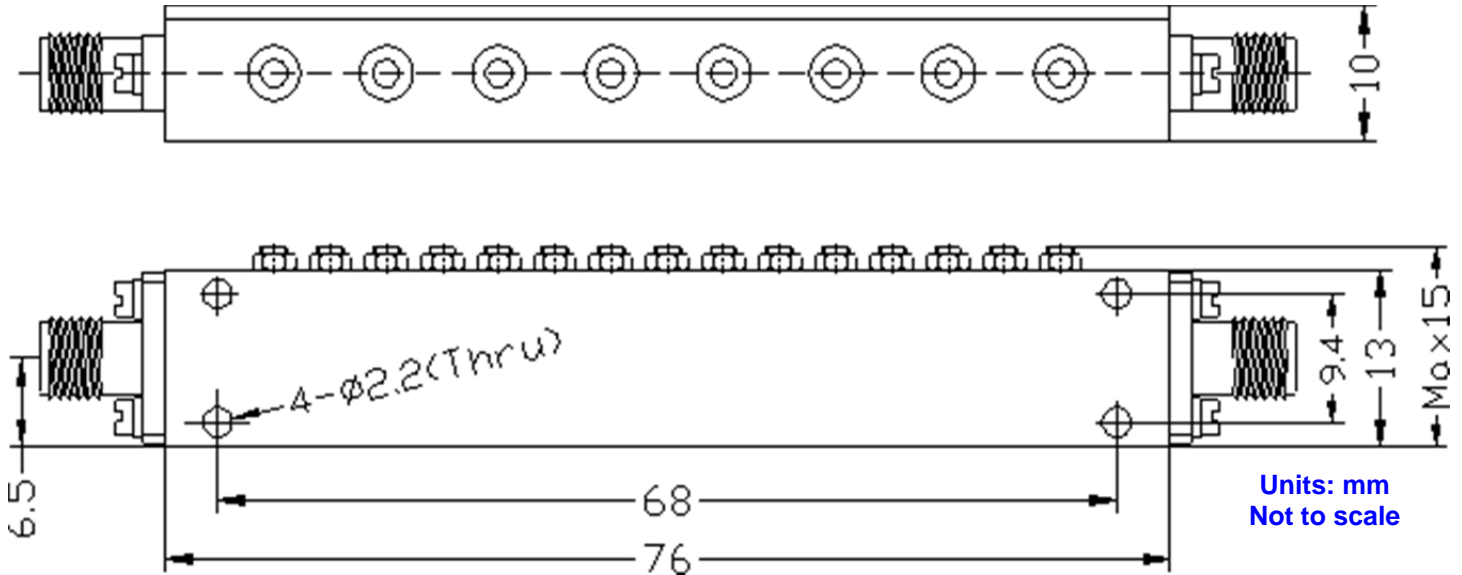

Order Examples: RCBPF-13.75-14.50-Sf-10W-c14

Description: (Cavity Band Pass Filter, 13.75-14.50GHz, SMA Female Connectors, 10Watts)

Specifications	
Center Frequency (F0)	14.125GHz
Pass Band Frequency	13.75~14.5GHz
Pass Band Insertion Loss	≤1.0dB
Pass Band VSWR	≤1.5:1
Stop Band Rejection	≥70dB @ DC~12.8GHz ≥50dB @ 15~20GHz
Impedance	50 ohms
Power Handling	≤10W
Connectors	SMA-Female
Surface Finish	The Original Silver Color or Black Paint