


## Cavity Band Pass Filter, 900-920 MHz SMA Female Connectors, 65 Watts

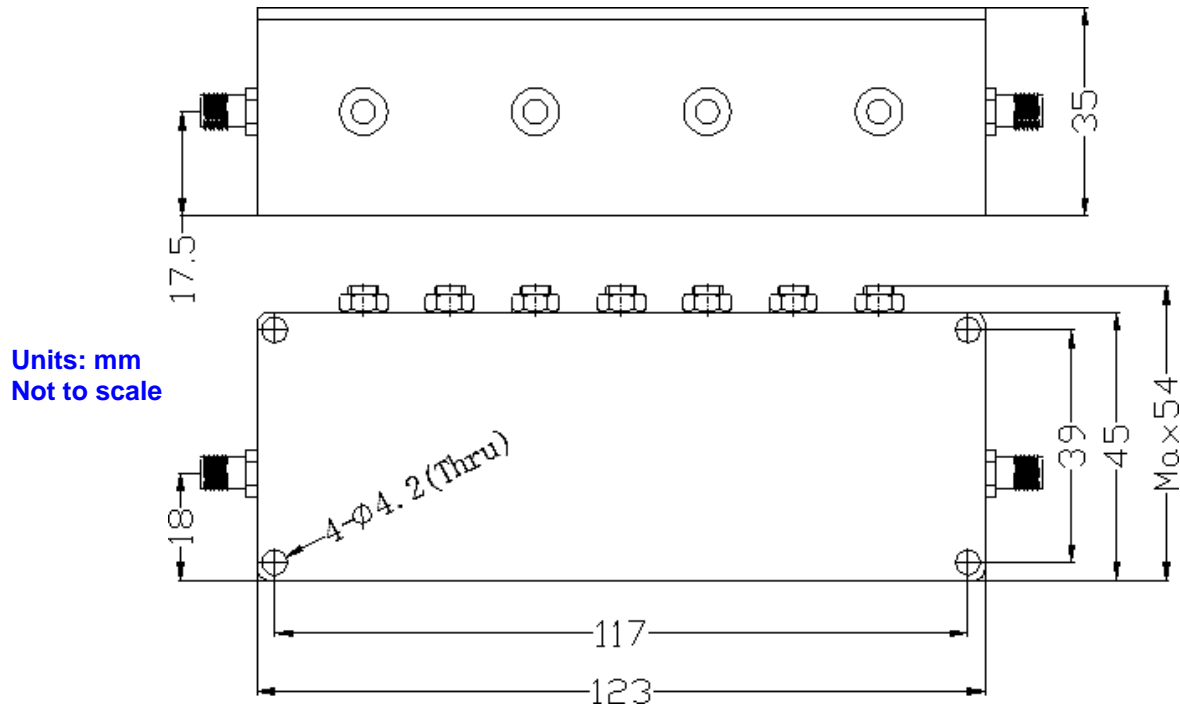

**Order Examples: RCBPF-900-920M-Sf-65W-c14**

**Description:** (Cavity Band Pass Filter, 900-920MHz, SMA Female Connectors, 65Watts)

Specifications	
Center Frequency (F0)	<b>910 MHz</b>
Pass Band Frequency	<b>900-920 MHz</b>
Pass Band Insertion Loss	≤0.4 dB (Type≤0.25dB)
Pass Band VSWR	≤1.2:1
Stop Band Rejection	≥40 dB @ 1800-2760MHz
Impedance	50 ohms
Power Handling	≤65W
Connectors	SMA-Female
Surface Finish	Black Paint