


Waveguide Isolator, WR28, 26.5-40GHz, Full and Part Bands Faraday Rotational, 1-1.5Watts Average Power



WR28
7.11 x 3.56mm ± 0.02
(0.28 x 0.14)

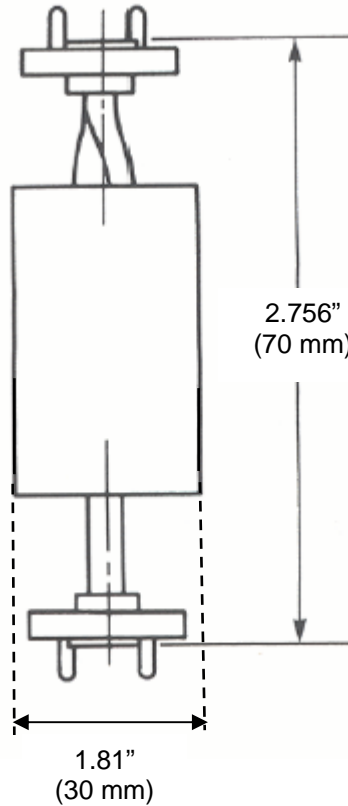

Equivalent to HP Model
R365A

Units: Inch (mm)
Not to scale

Direction of RF:	
R	Default ▶
L	◀

Order Examples: **RADI-26.5-40-WR28-1.5WR-Faraday-b**
I=ISOLATOR / C=CIRCULATOR

Specifications			Units
Frequency	26.5-40	26.5-37.5	GHz
Insertion loss	1.5	1.5	dB max
Isolation	25	25	dB min
VSWR	1.4	1.4	:1 max
Waveguide (Flange)	WR-28	WR-28	
Power (Average)	1.5	1	Watts
Temperature Range	0 to +50	0 to +50	°C