


RADITEK INC.

70 MHz SAW Band Pass Filter

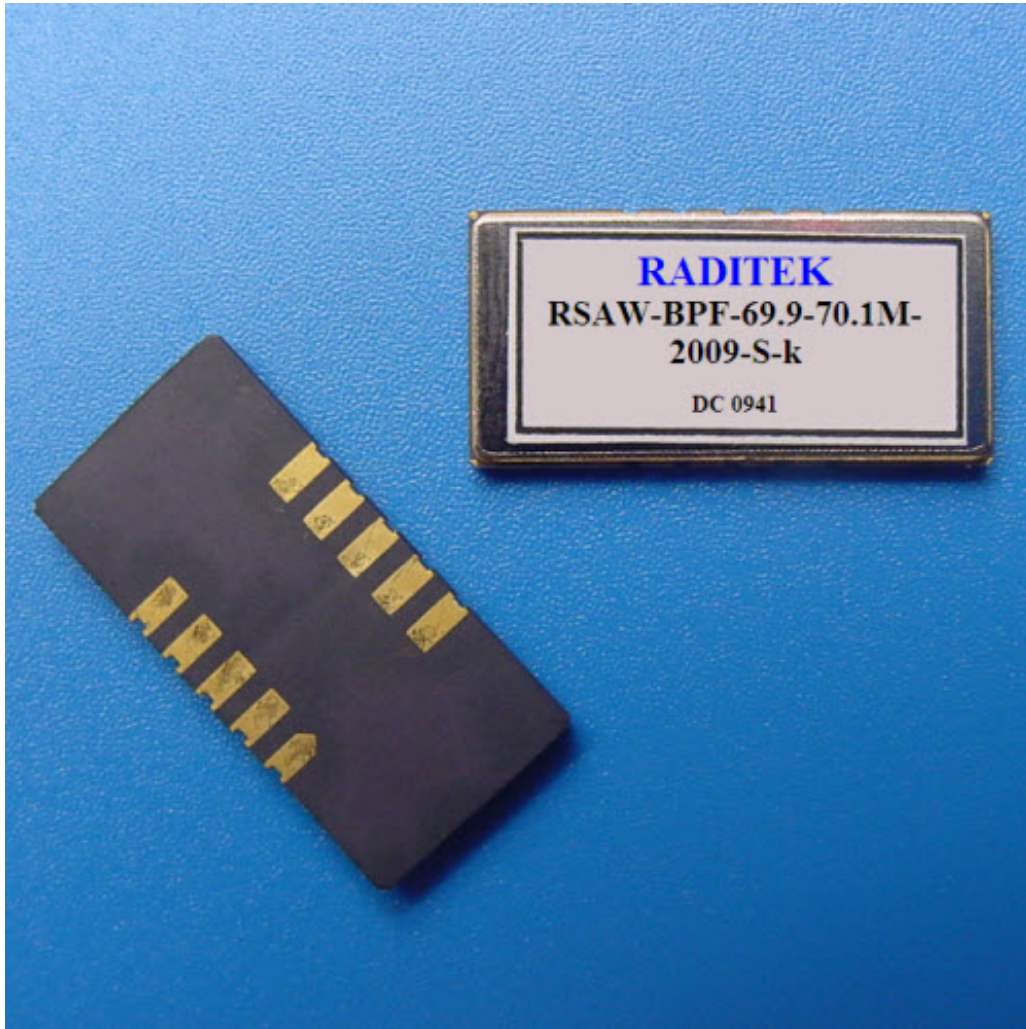

RSAW-BPF 69.9-70.1MHz: RADITEK specializes in Design, Development, Manufacturing of "High Volume/Low Cost" Wireless and Microwave products. Our new SAW Band Pass Filter operates at 70 MHz with a bandwidth of ± 0.10 . Insertion Loss: Fo 18.36 dB, Passband Ripple: 0.69 dB, 3dB Bandwidth: 3.608 MHz, Attenuation: 17.31dB @ Fo-2.1MHz and 20.62dB @ Fo+2.1MHz

Dimensions: (W) 20.00 x (L) 9.80 x (H) 1.56 mm

These units are proven in the field and are fully ROHS compliant.

Please see our website at <http://www.raditek.com/> or email us at Sales@Raditek.com with any questions you may have.

WORLD HQ: 1702L Meridian Ave. Suite 127, San Jose, Ca 95125, U.S.A.

Telephone: (408) 266-7404 FAX: (408) 266-4483

WEB: www.raditek.com, E-mail: sales@raditek.com