



Coaxial Circulator, 7.0-8.5 GHz N-type Connector, 1 Watt RADC-7.0-8.5-N23-1WR

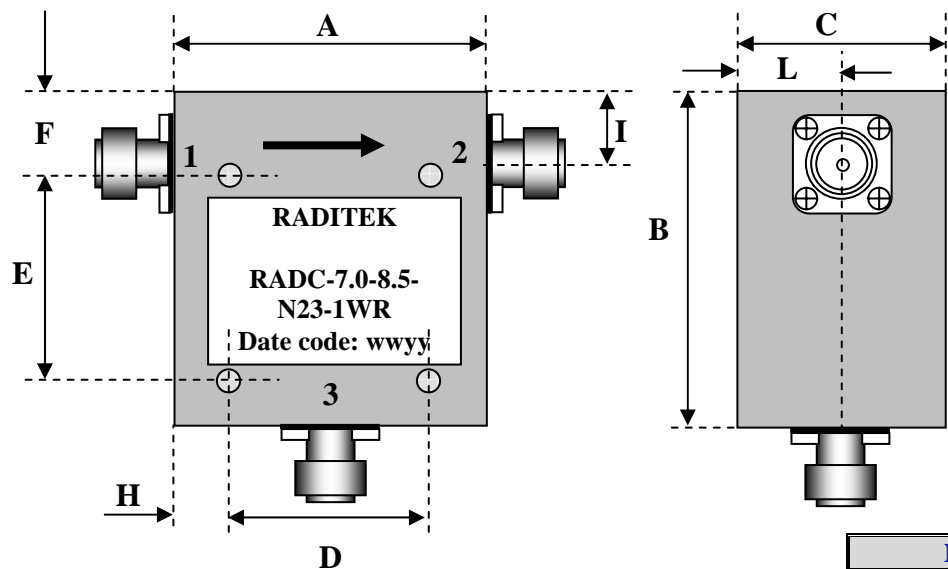

Tolerance (unless otherwise stated):

Hole diameter	±0.004
Dimensions	±0.015
Machined surfaces	63√
Flatness	±0.001/inch
Bend radius	1/32 inch

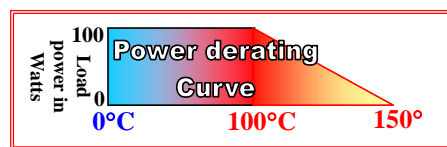

Direction of RF:

R	Default	
L		

Units: mm
Not to scale

Order Examples: **RADC-7.0-8.5-N23-1WR**
I=ISOLATOR / C=CIRCULATOR

N / SMA Connector options (X)				
Isolator			Circulator	
Port 1	Port 2		Port 3 Male	Port 3 Female
Female	Male	-1	-11	-21
Male	Female	-2	-12	-22
Female	Female	-3	-13	-23
Male	Male	-4	-14	-24

Size#	A	B	C	D	E	F	H	I	L	
1	35.0	38.0	22.8	25.0	13.0	tba	tba	tba	tba	mm
										mm

Size#	Specifications: Frequency GHz	Insertion loss dB (max)	Isolation dB (min)	VSWR :1	Power Fwd Watts	Power Rev Watts	Temp °C	Connector
1	7.0-8.5	0.5	18	1.30	1	1	-10 to +65	N-Type